| PART NUMBER | REV. | DATE | COMMENTS | INITIAL |
|---|---|---|---|---|
| TBF-09000950-60S | 1 | 2020/3/19 | ENGINEERING RELEASE | |

## Specifications

RoHS Compliant

Passband Frequency Range ..... 9000-9500MHz
Center Frequency($F_0$) ..... 9250MHz
Passband Insertion Loss ..... 1.0dB max@9250MHz
Passband VSWR ..... 1.3:1 max
Stopband Rejection ..... 60dB min@DC-8790MHz
..... 60dB min@9700-18000MHz
Power Handling ..... 5W max
Impedance ..... 50 Ohms
Operating Temperature ..... -30℃~+70℃
Connectors ..... SMA-Female
Finish ..... Black Painted
Weight ..... 95g

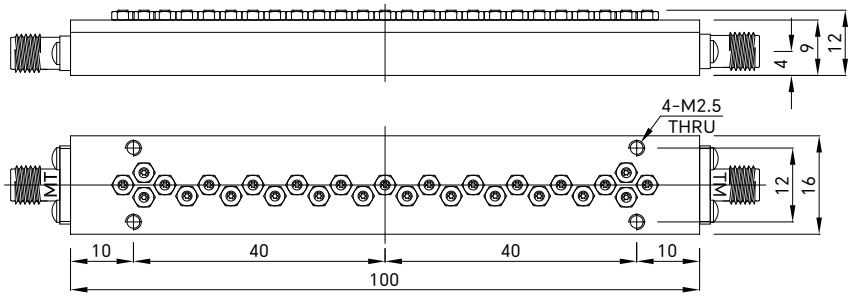


Drawing not to scale, units:mm


成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com
Tel: +86 130 866 58398
Email: sales@titan-microwave.com
chris@titan-microwave.com


| PART NUMBER | DESCRIPTION |
|---|---|
| TBF-09000950-60S | Cavity Band Pass Filter, Passband 9~9.5GHz<br>Stopband Rejection 60dB, 5W, SMA-Female |
| CAGE CODE / SIGNATURE | |


EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.