

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/9/5	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Frequency Range	500~8000MHz
Insertion Loss	3.8dB max
(excluding theoretical insertion loss 12.0dB)	
Isolation	18dB min
Input VSWR	1.80 max
Output VSWR	1.60 max
Amplitude Balance	±0.8dB max
Phase Balance	±8° max
Forward Power	20W
Reverse Power	2W
Impedance	50 Ohms

### ► Mechanical Data

Dimensions	212×124×10mm
Input Connector	SMA-Female
Output Connectors	SMA-Female
Surface Finish	Grey/Black/Blue Painted

### ► Environmental Data

Operating Temperature	-45°C~+85°C
-----------------------	-------------

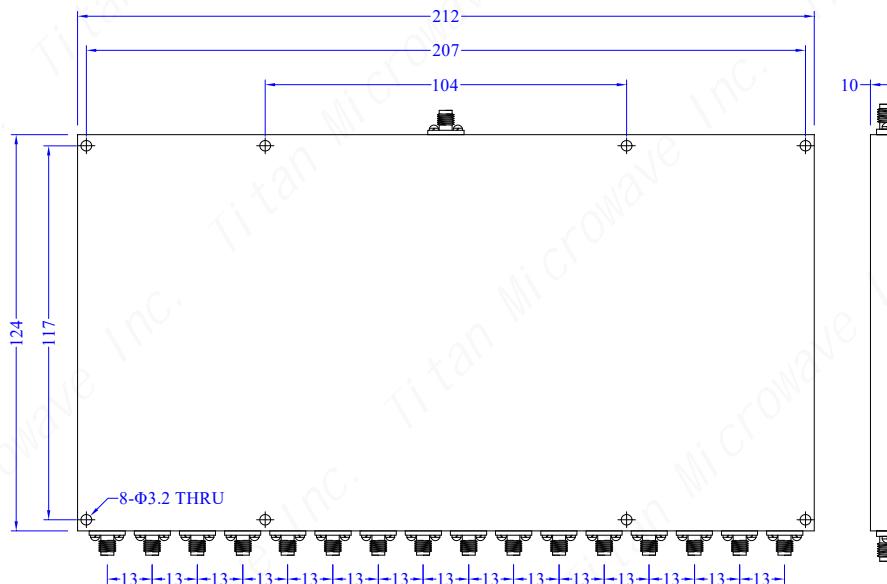

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 05/09/22	TITLE:  Power Divider, 16-Way, 0.5-8GHz, 20W, SMA- Female	PART No.:  TMPD16-00500800-S20	 <b>TITAN MICROWAVE INC.</b> <i>- A Professional RF &amp; Microwave Components Supplier -</i> <a href="http://www.titan-microwave.com">www.titan-microwave.com</a>
ENGINEER: J. Zhu 05/09/22			
APPROVED: C. Chen 05/09/22			
TOLERANCE UNLESS OTHERWISE SPECIFIED			
x      ±0.50      [0.019"]			
.x      ±0.20      [0.008"]			
.xx      ±0.10      [0.004"]			
ANGLES      ±1°			
			DIMENSIONS IN MILLIMETERS(mm)
SIZE: A4	SCALE:	SHEET: 1/1	REV: A