

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/9/5	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	6~18GHz
Insertion Loss	1.8dB max (excluding theoretical insertion loss 12.0dB)
Isolation	16dB min
Input VSWR	1.80 max
Output VSWR	1.50 max
Amplitude Balance	±0.5dB max
Phase Balance	±10°
Forward Power	10W
Reverse Power	1W
Impedance	50 Ohms

► Mechanical Data

Dimensions	212×75×10mm
Input Connector	SMA-Female
Output Connectors	SMA-Female
Surface Finish	Grey/Black/Blue Painted

► Environmental Data

Operating Temperature	-45°C~+85°C
-----------------------	-------------

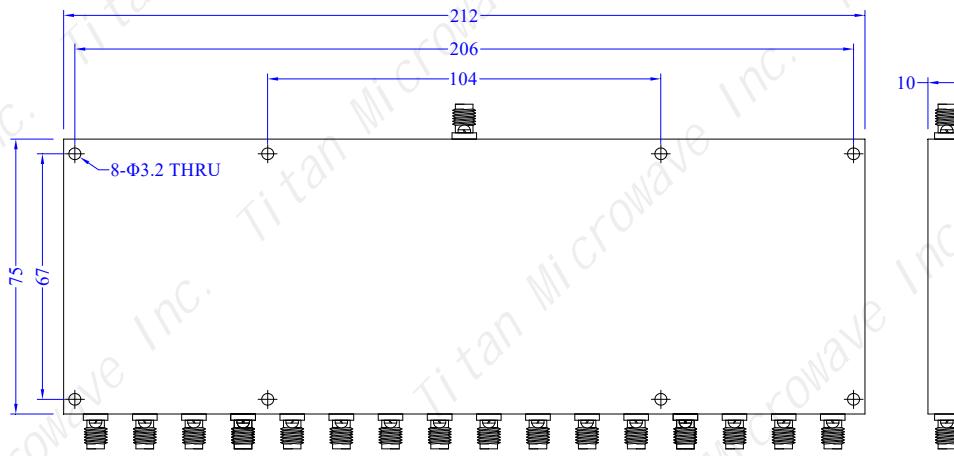

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 05/09/22	TITLE: Power Divider, 16-Way, 6-18GHz, 10W, SMA- Female	TITAN MICROWAVE INC. A Professional RF & Microwave Components Supplier www.titan-microwave.com
ENGINEER: J. Zhu 05/09/22		
APPROVED: C. Chen 05/09/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x ±0.50 [0.019"]		
.x ±0.20 [0.008"]		
.xx ±0.10 [0.004"]		
ANGLES ±1°		
	PART No.:	DIMENSIONS IN MILLIMETERS(mm)
	TMPD16-06001800-10S	
	SIZE: A4	SCALE:
		SHEET: 1/1
		REV: A