

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/6/15	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	2000~8000MHz
Insertion Loss	2.0dB max
(excluding theoretical insertion loss 10.8dB)	
Isolation	18dB min
Input VSWR	1.70 max
Output VSWR	1.40 max
Amplitude Balance	±0.8dB max
Phase Balance	±8°
Forward Power	20W
Reverse Power	1W
Impedance	50 Ohms

► Mechanical Data

Dimensions	156×92×10mm
Input Connector	SMA-Female
Output Connectors	SMA-Female
Surface Finish	Grey/Black/Blue Painted

► Environmental Data

Operating Temperature	-45°C~+85°C
-----------------------	-------------

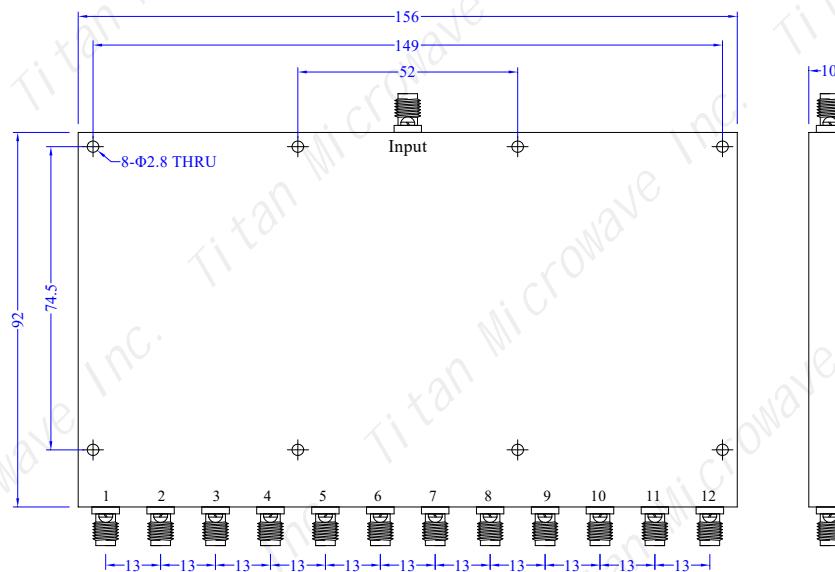

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 15/06/22	TITLE: Power Divider, 12-Way, 2-8GHz, 20W, SMA- Female	TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier - www.titan-microwave.com
ENGINEER: J. Zhu 15/06/22		
APPROVED: C. Chen 15/06/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x ±0.50 [0.019"]		
.x ±0.20 [0.008"]		
.xx ±0.10 [0.004"]		
ANGLES ±1°		
	PART No.:	DIMENSIONS IN MILLIMETERS(mm)
	TMPD12-02000800-20S	
SIZE: A4	SCALE:	SHEET: 1/1
		REV: A