

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/6/15	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	2~4GHz
Insertion Loss	1.0dB max
(excluding theoretical insertion loss 9dB)	
Isolation	20dB min
Input VSWR	1.5 max
Output VSWR	1.5 max
Amplitude Balance	± 0.4 dB max
Phase Balance	$\pm 4^\circ$
Forward Power	20W
Reverse Power	1W
Impedance	50 Ohms

► Mechanical Data

Dimensions	132×64×10mm
Input Connector	SMA-Female
Output Connectors	SMA-Female
Surface Finish	Grey/Black/Blue Painted

► Environmental Data

Operating Temperature	-40°C~+80°C
Storage Temperature	-45°C~+85°C

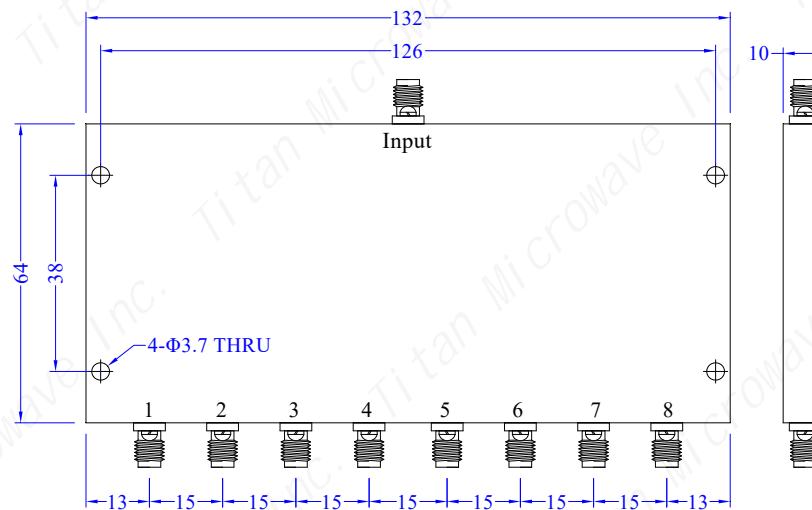

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 15/06/22	TITLE: Power Divider, 8-Way, 2-4GHz, 20W, SMA-Female	PART No.: TMPD8-02000400-20SA	 TITAN MICROWAVE INC. <i>- A Professional RF & Microwave Components Supplier -</i> www.titan-microwave.com
ENGINEER: J. Zhu 15/06/22			
APPROVED: C. Chen 15/06/22			
TOLERANCE UNLESS OTHERWISE SPECIFIED			
x ± 0.50 [0.019"]			
.x ± 0.20 [0.008"]			
.xx ± 0.10 [0.004"]			
ANGLES $\pm 1^\circ$			
	DIMENSIONS IN MILLIMETERS(mm)		
	SIZE: A4	SCALE:	SHEET: 1/1
			REV: A