


REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/8/11	C. Chen

## TECHNICAL DATA

### ► Electrical Data(50Ω, 25°C)

Frequency Range	9.2~9.6GHz
Max Output Power(Pulse)	≥50dBm
Gain	≥48dB
Gain Flatness	≤1±1dB
Input VSWR	≤1.7:1
Input Power	1±1dBm
Pulse Width	100us
Rise Time/Fall Time	≤200ns
Harmonic@Worst point	≤-20dBc
Spurious	≤-65dBc
Temperature Protection	Over 80°C protection
PTT Port	Default OFF, 3.3-5V ON
Operating Voltage	+28V~+30V
Operating Current	≤3.5A
VCC/Current Reference	28V/5A

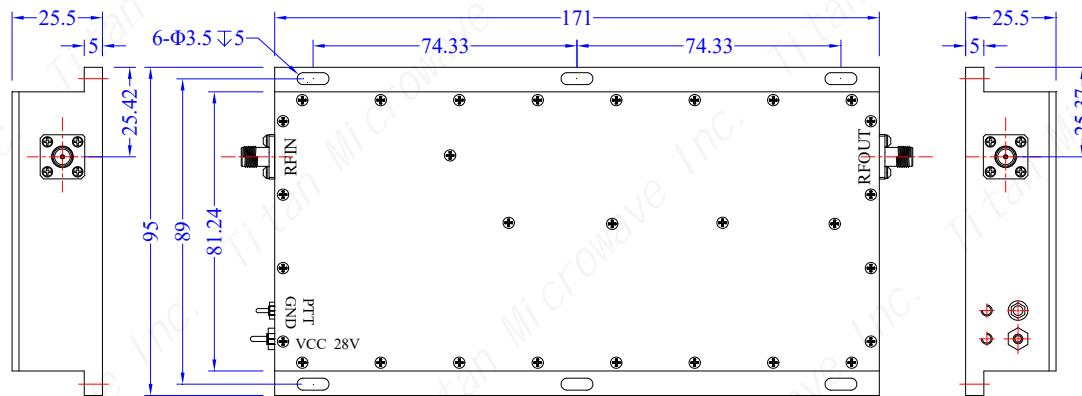

### ► Mechanical Data

Dimensions	171×95×25.5mm
Input Connector	SMA-Female
Output Connector	SMA-Female
28V Power Supply Connector	Feedthru Capacitor
Weight	600g max
Package	1 piece/box

### ► Environmental Data

Operating Temperature	-30°C~+55°C
-----------------------	-------------

! Stress above these ratings may cause permanent damage to the device  
Radiator/Heatsink required during operation or test

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 11/08/23	TITLE:  Power Amplifier, 9.2-9.6GHz, Gain 48dB, Output Power 50dBm, +28V, SMA-Female	PART No.:  TMPA-09200960-4850	DIMENSIONS IN MILLIMETERS(mm)  SIZE: A4    SCALE:    SHEET: 1/1    REV: A
ENGINEER: J. Zhu 11/08/23			
APPROVED: C. Chen 11/08/23			
TOLERANCE UNLESS OTHERWISE SPECIFIED			
x ±0.50 [0.019"]			
.x ±0.20 [0.008"]			
.xx ±0.10 [0.004"]			
ANGLES ±1°			

 成都巨人微波  
**TITAN MICROWAVE INC.**  
*- A Professional RF & Microwave Components Supplier -*

[www.titan-microwave.com](http://www.titan-microwave.com)