


REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/4/19	C. Chen

TECHNICAL DATA

► Electrical Data

Frequency Range	1100-1280MHz
Max Output Power(Psat)	≥50dBm
Gain	≥49dB
Gain Flatness	≤1±1dB
VSWR Input	≤1.6
Input Power	1±1dBm
Max Input Power	+6dBm
Spurious	≤-65dBC
Harmonic	≤-25dBC
Impedance	50 Ohms
PTT Port	Default OFF, 3.3~5V ON
Temperature Protection	Over 80°C protection with open circuit protection
Operation Current	≤9~10A
Operation Voltage	+28V~+32V
VCC/Current Reference	28V/12A

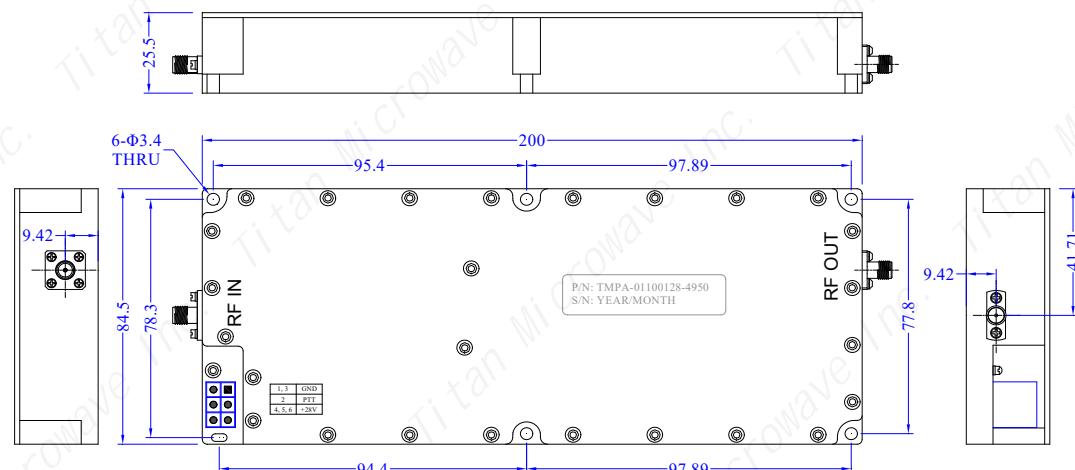

► Mechanical Data

Dimensions	200×84.5×25.5mm
Input Connector	SMA-Female
Output Connector	SMA-Female
28V Power Supply Interface	5557-4.2mm power-6
Package	1 piece/box
Weight	≤640g

► Environmental Data

Operating Temperature -40°C~+55°C

! Stress above these ratings may cause permanent damage to the device

Radiator/Heatsink required during operation or test

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 19/04/22	TITLE: Power Amplifier, 1.1~1.28GHz, Gain 49dB, Output Power 50dBm, +28V, SMA-Female	PART No.: TMPA-01100128-4950	 TITAN MICROWAVE INC. <i>- A Professional RF & Microwave Components Supplier -</i> www.titan-microwave.com
ENGINEER: J. Zhu 19/04/22			
APPROVED: C. Chen 19/04/22			
TOLERANCE UNLESS OTHERWISE SPECIFIED			
x ±0.50 [0.019"]			
.x ±0.20 [0.008"]			
.xx ±0.10 [0.004"]			
ANGLES ±1°			
	DIMENSIONS IN MILLIMETERS(mm)		
	SIZE: A4	SCALE:	SHEET: 1/1
			REV: A