


REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/6/11	C. Chen

TECHNICAL DATA

► Electrical Data

Frequency Range	3000~6000MHz
Max Output Power(Psat)	≥50dBm
Gain	≥49dB
Gain Flatness	≤±2.5dB
VSWR Input	≤1.7
Input Power	2±2dBm
Spurious	≤-65dbc
Harmonic@worst point	≤-10dbc
Impedance	50 Ohms
PTT Port	Default OFF, 3.3~5V ON
Temperature Protection	Over 80°C protection
Operation Voltage	+28V~+30V
Operation Current	≤9~10A
VCC/Current Reference	+30V/12A

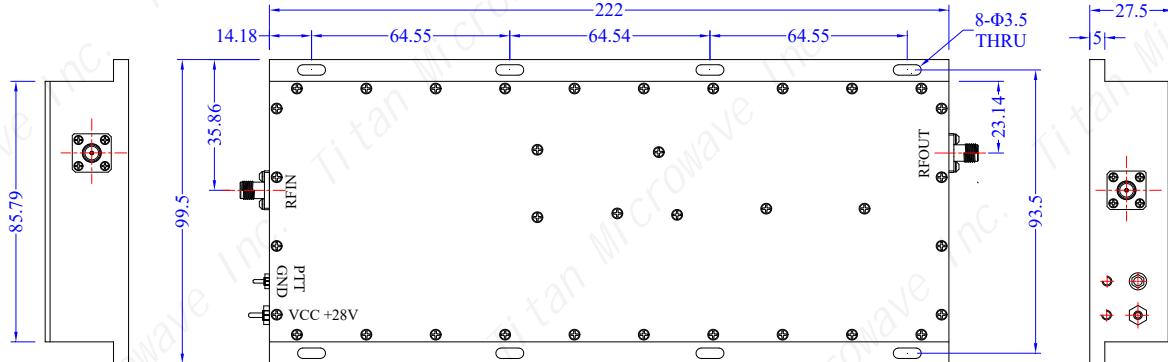

► Mechanical Data

Dimensions	222×99.5×27.5mm
Input Connector	SMA-Female
Output Connector	SMA-Female
28V Power Supply Interface	Feedthru Capacitor

► Environmental Data

Operating Temperature -25°C~+55°C

! Stress above these ratings may cause permanent damage to the device

Radiator/Heatsink required during operation or test

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 11/06/22	TITLE: Power Amplifier, 3-6GHz, Gain 49dB, Output Power 50dBm, +28V, SMA- Female		
ENGINEER: J. Zhu 11/06/22			
APPROVED: C. Chen 11/06/22			
TOLERANCE UNLESS OTHERWISE SPECIFIED			
x ±0.50 [0.019"]			
.x ±0.20 [0.008"]			
.xx ±0.10 [0.004"]			
ANGLES ±1°			
PART No.:		DIMENSIONS IN MILLIMETERS(mm)	
TMPA-03000600-4950		SIZE: A4	SCALE: 1/1
REV: A			

TITAN MICROWAVE INC.
A Professional RF & Microwave Components Supplier

www.titan-microwave.com