


REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/4/19	C. Chen

TECHNICAL DATA

► Electrical Data

Frequency Range	4~6GHz
Max Output Power(Psat, CW)	≥50dBm
Gain	≥49dB
Gain Flatness	≤2±1dB
VSWR Input	≤1.7
Input Power	2±1dBm
Spurious	≤-65dbc
Harmonic@worst point	≤-20dbc
Impedance	50 Ohms
PTT Port	Default OFF, 3.3~5V ON
Temperature Protection	Over 80°C protection
Operation Current	≤9~11A
Operation Voltage	+28V~+30V
VCC/Current Reference	30V/13.8A

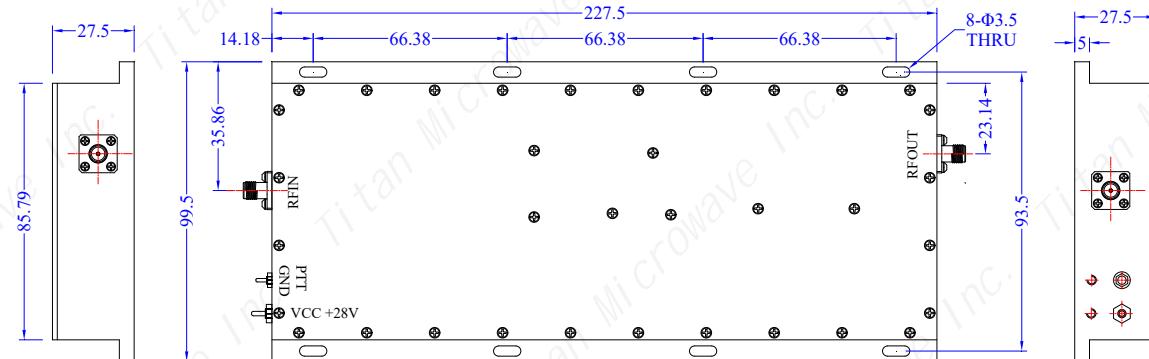

► Mechanical Data

Dimensions	227.5×99.5×27.5mm
Input Connector	SMA-Female
Output Connector	SMA-Female
Power Supply Interface	Feedthru Capacitor
Package	1 piece/box
Weight	≤2060g

► Environmental Data

Operating Temperature	-30°C~+55°C
-----------------------	-------------

! Stress above these ratings may cause permanent damage to the device
Radiator/Heatsink required during operation or test

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 19/04/22	TITLE: Power Amplifier, 4~6GHz, Gain 49dB, Output Power 50dBm, +28V, SMA- Female	PART No.: TMPA-04000600-4950	DIMENSIONS IN MILLIMETERS(mm)
ENGINEER: J. Zhu 19/04/22			
APPROVED: C. Chen 19/04/22			
TOLERANCE UNLESS OTHERWISE SPECIFIED			
x ±0.50 [0.019"]			
.x ±0.20 [0.008"]			
.xx ±0.10 [0.004"]			
ANGLES ±1°			
SIZE: A4	SCALE:	SHEET: 1/1	REV: A

 成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com