


REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/7/12	C. Chen

TECHNICAL DATA

► Electrical Data

Passband Frequency Range	4750~6500MHz
Passband Insertion Loss	$\leq 1.0\text{dB}$
Passband VSWR	≤ 1.4
Passband Ripple	$\leq 0.8\text{dB}$
Stopband Rejection	$\geq 60\text{dB@DC}\sim 4250\text{MHz}$ $\geq 60\text{dB@7000MHz}$ $\geq 80\text{dB@10000}\sim 16000\text{MHz}$
Bandwidth	$-1\text{dB}\geq 1750\text{MHz}$
Power Handling	5W(design assurance)
Impedance	50 Ohms

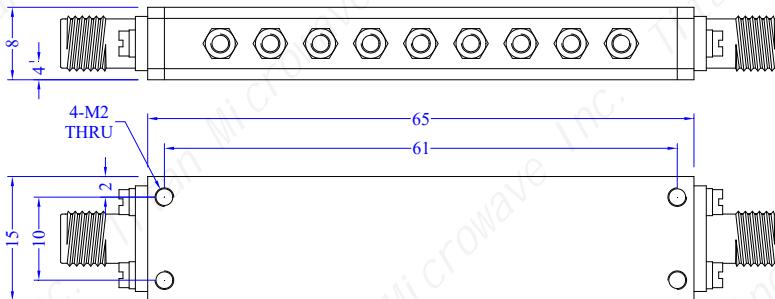

► Mechanical Data

Dimensions	65×18×8mm
Connectors	SMA-Female(detachable 0.38mm pin)
Surface Finish	Silver Plated
Material	Aluminum 6061

► Environmental Data

Operating Temperature	-40°C~+70°C(design assurance)
Storage Temperature	-55°C~+85°C(design assurance)

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 12/07/22	TITLE:		 成都巨人微波 TITAN MICROWAVE INC. <i>- A Professional RF & Microwave Components Supplier -</i> www.titan-microwave.com		
ENGINEER: J. Zhu 12/07/22	APPROVED: C. Chen 12/07/22	TOLERANCE UNLESS OTHERWISE SPECIFIED			
x ± 0.50 [0.019"]				DIMENSIONS IN MILLIMETERS(mm)	
.x ± 0.20 [0.008"]	PART No.:	.xx ± 0.10 [0.004"]	TBF-04750650-80S	SIZE: A4	SCALE: 1/1
ANGLES $\pm 1^\circ$				REV: A	