


REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/7/12	C. Chen

TECHNICAL DATA

► Electrical Data

Passband Frequency Range	5.38~6.62GHz
Passband Insertion Loss	≤1.5dB
Passband VSWR	≤1.35
Passband Ripple	≤0.5dB
Stopband Rejection	≥50dB@DC~5000MHz ≥50dB@7000~16000MHz
Power Handling	20W(design assurance)
Impedance	50 Ohms

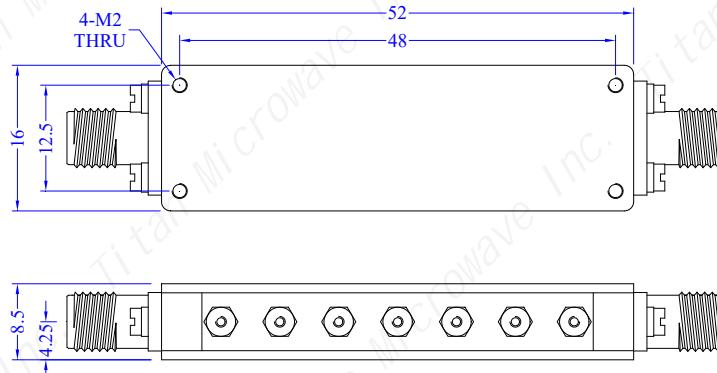

► Mechanical Data

Dimensions	52×16×8.5mm
Connectors	SMA-Female(detachable 0.38mm pin)
Connector Material	Stainless Steel
Surface Finish	Silver Plated

► Environmental Data

Operating Temperature	-40°C~+70°C(design assurance)
Storage Temperature	-55°C~+85°C(design assurance)

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 12/07/22	TITLE: Band Pass Filter, 5.38- 6.62GHz, 50dB, 20W, SMA-Female	PART No.: TBF-05380662-50S	DIMENSIONS IN MILLIMETERS(mm)
ENGINEER: J. Zhu 12/07/22			
APPROVED: C. Chen 12/07/22			
TOLERANCE UNLESS OTHERWISE SPECIFIED			
x ±0.50 [0.019"]			
.x ±0.20 [0.008"]			
.xx ±0.10 [0.004"]			
ANGLES ±1°			
SIZE: A4	SCALE:	SHEET: 1/1	REV: A

 成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com