


REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

TECHNICAL DATA

► Electrical Data

Pass Band Frequency	DC-14GHz
Pass Band Insertion Loss	≤2.2dB
Pass Band VSWR	≤1.5:1
Stop Band Rejection	≥20dB@19.5GHz, 40dB typ@22GHz
Impedance	50 Ohms
Power Handling	≤0.2W

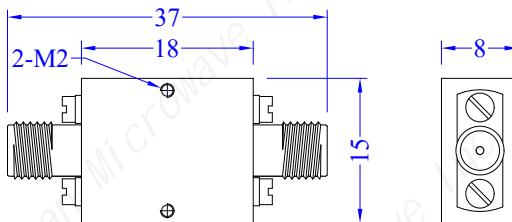

► Mechanical Data

Dimensions	37×15×8mm
Connectors	SMA-Female(stainless steel)
Surface Finish	Nickel Plated

► Environmental Data

Temperature Range	-40°C~+70°C
-------------------	-------------

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 12/09/23	TITLE: Low Pass Filter, DC-14GHz, Stop Band Rejection 40dB, 0.2W, SMA-Female	PART No.: TLF-14000-40S	DIMENSIONS IN MILLIMETERS(mm)
ENGINEER: J. Zhu 12/09/23			
APPROVED: C. Chen 12/09/23			
TOLERANCE UNLESS OTHERWISE SPECIFIED			
x ±0.50 [0.019"]			
.x ±0.20 [0.008"]			
.xx ±0.10 [0.004"]			
ANGLES ±1°			
SIZE: A4	SCALE:	SHEET: 1/1	REV: A

TITAN MICROWAVE INC.
A Professional RF & Microwave Components Supplier

www.titan-microwave.com