REV	DESCRIPTION OF REVISION	Ву	DATE	APPROVED
Α	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

TECHNICAL DATA

► Electrical Data

Pass Band Frequency DC-1400MHz Pass Band Insertion Loss ≤2.0dB Pass Band VSWR ≤1.5:1

Stop Band Rejection ≥50dB@1600~5000MHz


Impedance 50 Ohms Power Handling 2W

► Mechanical Data

45×15×10mm Dimensions Connectors SMA-Female Connector Material Stainless Steel Surface Finish **Black Painted**

► Environmental Data

Operating Temperature Range -40℃~+70℃ Storage Temperature Range -55℃~+85℃

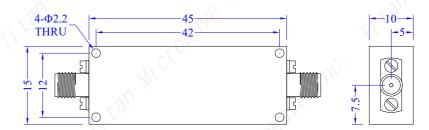

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

/	DRAWN: L. Ma 12/09/23 ENGINEER: J. Zhu 12/09/23					
	APPROVED: C. Chen 12/09/23					
	TOLERANCE UNLESS OTHERWISE SPECIFIED					
	×	±0.50	[0.019"]			
	.x	±0.20	[0.008"]			
	.xx	±0.10	[0.004"]			
	ANCLES	±10				

TITLE:

Low Pass Filter, DC-1.4GHz, Stop Band Rejection 50dB, 2W, SMA-Female

PART No.:

TLF-1400-50S



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: Α4 SCALE:

SHEET: 1/1 REV:

Α