

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/7/11	C. Chen


TECHNICAL DATA

► Electrical Data

Pass Band Frequency	DC-2000MHz
Pass Band Insertion Loss	≤1.0dB
Pass Band VSWR	≤1.5:1
Stop Band Rejection	≥50dB@2600~6000MHz
Impedance	50 Ohms
Power Handling	40W

► Mechanical Data

Dimensions	55×24×10mm
Connectors	SMA-Female
Surface Finish	Black Painted

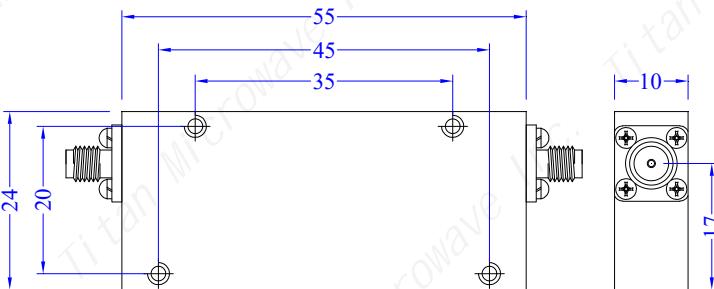

► Environmental Data

Operating Temperature	-40°C~+70°C
Storage Temperature	-55°C~+85°C

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 11/07/23	TITLE: Low Pass Filter, DC-2000MHz, Stop Band Rejection 50dB, 40W, SMA-Female		 成都巨人微波 TITAN MICROWAVE INC. <small>A Professional RF & Microwave Components Supplier</small>	
ENGINEER: J. Zhu 11/07/23				
APPROVED: C. Chen 11/07/23				
TOLERANCE UNLESS OTHERWISE SPECIFIED	x ±0.50 [0.019"]	.x ±0.20 [0.008"]	.xx ±0.10 [0.004"]	ANGLES ±1°
			DIMENSIONS IN MILLIMETERS(mm)	
			SIZE: A4	SCALE: 1/1
			SHEET: 1/1	REV: A