

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

TECHNICAL DATA

► Electrical Data


Stop Band Frequency	643~678MHz
Stop Band Attenuation	≥50dB
Pass Band Frequency	DC~613MHz&733~1800MHz
Pass Band Insertion Loss	≤1.0dB
Pass Band VSWR	≤1.5:1@330~613MHz&733~1800MHz
Power Handling	≤1.6:1@DC~330MHz
Impedance	≤10W 50 Ohms

► Mechanical Data

Dimensions	265×96×28mm
Connectors	SMA-Female
Connector Material	Stainless Steel
Surface Finish	Black Painted

► Environmental Data

Temperature Range	0°C~+40°C
-------------------	-----------

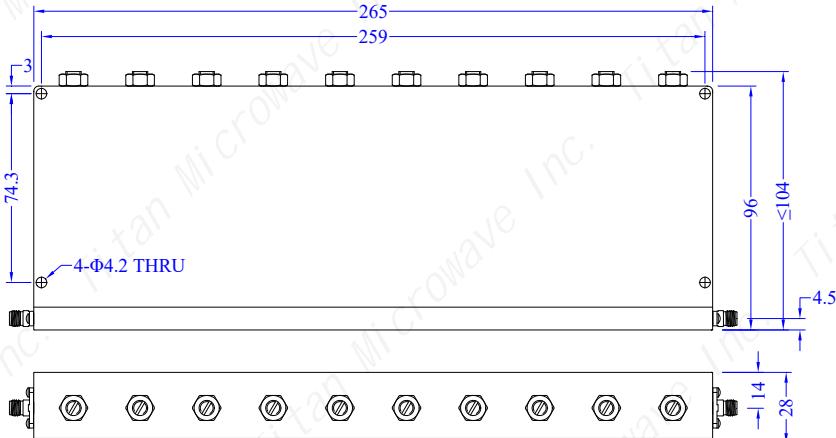

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 12/09/23	TITLE: Band Reject Filter, 643~678MHz, Stop Band Rejection 50dB, 10W, SMA-Female	TITAN MICROWAVE INC. A Professional RF & Microwave Components Supplier www.titan-microwave.com
ENGINEER: J. Zhu 12/09/23		
APPROVED: C. Chen 12/09/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x ±0.50 [0.019"]		
.x ±0.20 [0.008"]		
.xx ±0.10 [0.004"]		
ANGLES ±1°		
	PART No.: TRF-643M678M-50S	DIMENSIONS IN MILLIMETERS(mm)
SIZE: A4	SCALE:	SHEET: 1/1
		REV: A