

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

TECHNICAL DATA

► Electrical Data


Stop Band Frequency	887~907MHz
Stop Band Attenuation	≥50dB
Pass Band Frequency	DC~869MHz & 925~2700MHz
Pass Band Insertion Loss	≤1.0dB(at the corner ≤1.5dB)
Pass Band VSWR	≤1.5:1
Power Handling	≤20W
Impedance	50 Ohms

► Mechanical Data

Dimensions	248×77×28mm
Connectors	SMA-Female
Connector Material	Stainless Steel
Surface Finish	Black Painted

► Environmental Data

Temperature Range	-30°C~+70°C
-------------------	-------------

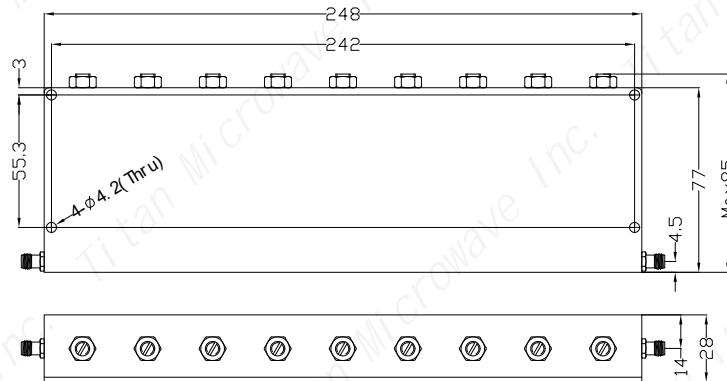

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 12/09/23	TITLE: Band Reject Filter, 887~907MHz, Stop Band Rejection 50dB, 20W, SMA-Female		 成都巨人微波 TITAN MICROWAVE INC. <small>A Professional RF & Microwave Components Supplier</small>	www.titan-microwave.com	
ENGINEER: J. Zhu 12/09/23	APPROVED: C. Chen 12/09/23	TOLERANCE UNLESS OTHERWISE SPECIFIED			
x ±0.50 [0.019"]			  DIMENSIONS IN MILLIMETERS(mm)	SIZE: A4 SCALE: SHEET: 1/1 REV: A	
.x ±0.20 [0.008"]					
.xx ±0.10 [0.004"]					
ANGLES ±1°					
TRF-887M907M-50S					