

| REV | DESCRIPTION OF REVISION | By | DATE | APPROVED |
|-----|-------------------------|--------|-----------|----------|
| A | INITIAL RELEASE | C. Cai | 2023/9/12 | C. Chen |

TECHNICAL DATA

► Electrical Data


| | |
|--------------------------|----------------------------|
| Stop Band Frequency | 1518~1525MHz |
| Stop Band Attenuation | ≥50dB |
| Pass Band Frequency | DC~1505MHz & 1538~4500MHz |
| Pass Band Insertion Loss | ≤1.5dB(at the corner ≤2dB) |
| Pass Band VSWR | ≤1.5:1 |
| Power Handling | ≤30W |
| Impedance | 50 Ohms |

► Mechanical Data

| | |
|--------------------|---------------|
| Dimensions | 215×53×28mm |
| Connectors | SMA-Female |
| Connector Material | Copper H59 |
| Surface Finish | Black Painted |

► Environmental Data

| | |
|-------------------|-------------|
| Temperature Range | -10°C~+50°C |
|-------------------|-------------|

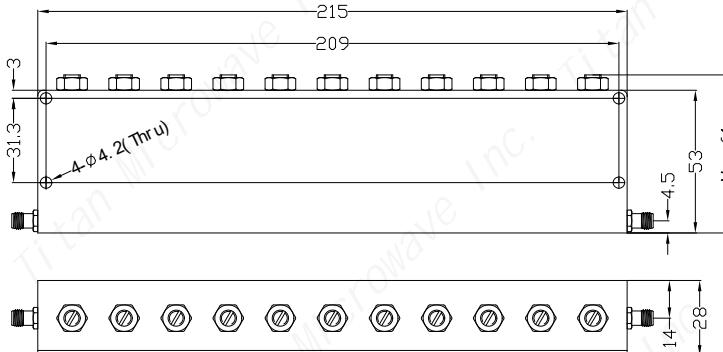

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

| | | | | |
|--------------------------------------|--|-------------------|---|------------|
| DRAWN: L. Ma 12/09/23 | TITLE: Band Reject Filter, 1518~1525MHz, Stop Band Rejection 50dB, 30W, SMA-Female | |  成都巨人微波 TITAN MICROWAVE INC. <small>- A Professional RF & Microwave Components Supplier -</small> | |
| ENGINEER: J. Zhu 12/09/23 | | | | |
| APPROVED: C. Chen 12/09/23 | | | | |
| TOLERANCE UNLESS OTHERWISE SPECIFIED | x ±0.50 [0.019"] | .x ±0.20 [0.008"] | .xx ±0.10 [0.004"] | ANGLES ±1° |
| | | | DIMENSIONS IN MILLIMETERS(mm) | |
| PART No.: | | | SIZE: A4 | SCALE: 1/1 |
| TRF-01510152-50S | | | REV: A | |