

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

TECHNICAL DATA

► Electrical Data


Stop Band Frequency	880~960MHz
Stop Band Attenuation	≥40dB
Pass Band Frequency	DC~862MHz & 978~2500MHz
Pass Band Insertion Loss	≤2.0dB
Pass Band VSWR	≤1.5:1
Power Handling	≤10W
Impedance	50 Ohms

► Mechanical Data

Dimensions	265×74×28mm
Connectors	SMA-Female
Connector Material	Copper H59
Surface Finish	Black Painted

► Environmental Data

Temperature Range	-20°C~+60°C
-------------------	-------------

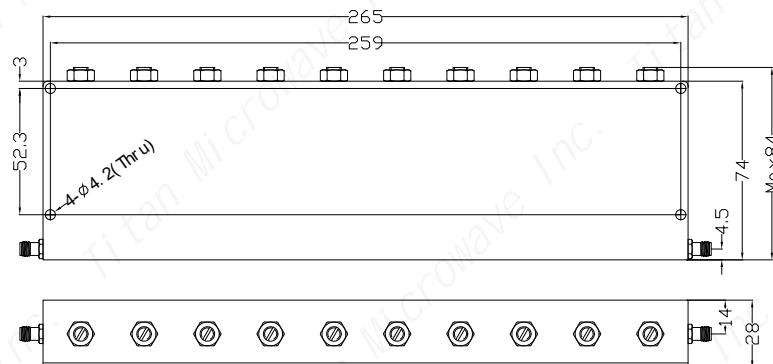

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 12/09/23	TITLE: Band Reject Filter, 880~960MHz, Stop Band Rejection 40dB, 10W, SMA-Female		 成都巨人微波 TITAN MICROWAVE INC. <i>- A Professional RF & Microwave Components Supplier -</i>	
ENGINEER: J. Zhu 12/09/23				
APPROVED: C. Chen 12/09/23				
TOLERANCE UNLESS OTHERWISE SPECIFIED	x ±0.50 [0.019"]	.x ±0.20 [0.008"]	.xx ±0.10 [0.004"]	ANGLES ±1°
			DIMENSIONS IN MILLIMETERS(mm)	
			SIZE: A4	SCALE: 1/1
			SHEET: 1/1	REV: A