

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

TECHNICAL DATA

► Electrical Data


Stop Band Frequency	4800~4900MHz
Stop Band Attenuation	≥40dB
Pass Band Frequency	DC~4740MHz & 4960~10000MHz
Pass Band Insertion Loss	≤2.5dB
Pass Band VSWR	≤1.7:1
Power Handling	≤20W
Impedance	50 Ohms

► Mechanical Data

Dimensions	141×28×16mm
Connectors	SMA-Female
Connector Material	Stainless Steel
Surface Finish	Black Painted

► Environmental Data

Temperature Range -30°C ~ +70°C

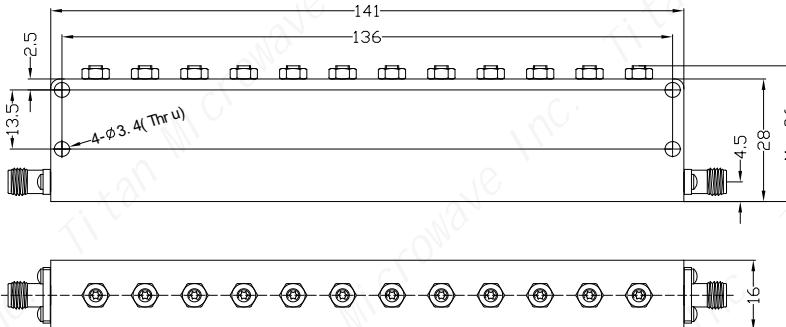

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 12/09/23	TITLE: Band Reject Filter, 4.8~4.9GHz, Stop Band Rejection 40dB, 20W, SMA-Female	 成都巨人微波 TITAN MICROWAVE INC. <i>- A Professional RF & Microwave Components Supplier -</i>				
ENGINEER: J. Zhu 12/09/23						
APPROVED: C. Chen 12/09/23						
TOLERANCE UNLESS OTHERWISE SPECIFIED		  DIMENSIONS IN MILLIMETERS(mm)				
x ± 0.50	[0.019"]	PART No.:	SIZE: A4	SCALE:	SHEET: 1/1	REV: A
.x ± 0.20	[0.008"]					
.xx ± 0.10	[0.004"]					
ANGLES	$\pm 1^\circ$	TRF-04800490-40S				