


REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

## TECHNICAL DATA


### ► Electrical Data

Stop Band Frequency	1850~1910MHz
Stop Band Attenuation	≥40dB
Pass Band Frequency	DC~1825MHz & 1940~4500MHz
Pass Band Insertion Loss	≤2.0dB
Pass Band VSWR	≤1.5:1
Power Handling	≤50W
Impedance	50 Ohms

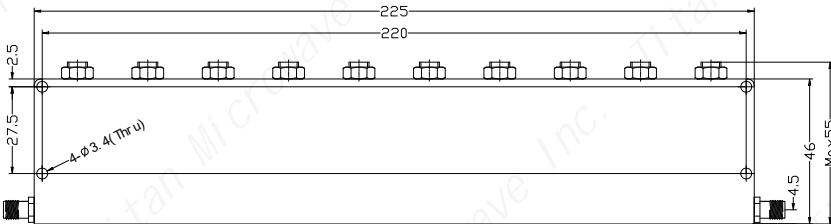

### ► Mechanical Data

Dimensions	225×46×22mm
Connectors	SMA-Female
Connector Material	Stainless Steel
Surface Finish	Black Painted



### ► Environmental Data

Temperature Range	-10°C~+50°C
-------------------	-------------

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 12/09/23	TITLE:		 成都巨人微波 <b>TITAN MICROWAVE INC.</b> - A Professional RF & Microwave Components Supplier -	
ENGINEER: J. Zhu 12/09/23				
APPROVED: C. Chen 12/09/23				
TOLERANCE UNLESS OTHERWISE SPECIFIED				
x ±0.50 [0.019"] .x ±0.20 [0.008"] ..xx ±0.10 [0.004"] ANGLES ±1°	DIMENSIONS IN MILLIMETERS(mm)		SHEET: 1/1	REV: A
PART No.:	SIZE: A4	SCALE:	SHEET: 1/1	REV: A
TRF-01850191-40S				