

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

TECHNICAL DATA

► Electrical Data


Stop Band Frequency	2110~2180MHz
Stop Band Attenuation	≥50dB
Pass Band Frequency	DC~2085MHz & 2210~6000MHz
Pass Band Insertion Loss	≤1.0dB@DC~2065MHz & 2230~6000MHz ≤2.0dB@2065~2085MHz & 2210~2230MHz
Pass Band VSWR	≤1.7:1
Power Handling	≤20W
Impedance	50 Ohms

► Mechanical Data

Dimensions	175×42×22mm
Connectors	SMA-Female
Connector Material	Stainless Steel
Surface Finish	Black Painted

► Environmental Data

Temperature Range	-20°C~+60°C
-------------------	-------------

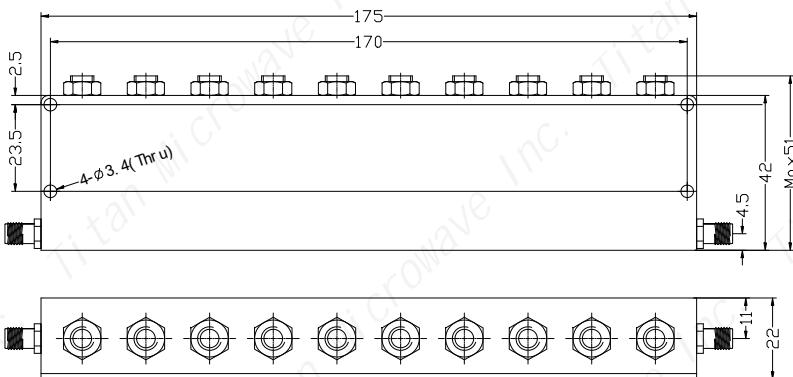

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 12/09/23	TITLE: Band Reject Filter, 2.11~2.18GHz, Stop Band Rejection 50dB, 20W, SMA-Female	PART No.: TRF-02110218-50S	 成都巨人微波 TITAN MICROWAVE INC. <i>A Professional RF & Microwave Components Supplier</i> www.titan-microwave.com		
ENGINEER: J. Zhu 12/09/23					
APPROVED: C. Chen 12/09/23					
TOLERANCE UNLESS OTHERWISE SPECIFIED					
x ±0.50 [0.019"]	DIMENSIONS IN MILLIMETERS(mm)				
.x ±0.20 [0.008"]	SIZE: A4				
.xx ±0.10 [0.004"]	SCALE: 1/1				
ANGLES ±1°	SHEET: REV: A				