

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	26-28GHz
Insertion Loss	2.0dB max
VSWR Primary	1.6 max
VSWR Secondary	1.6 max
Isolation	16dB min
Amplitude Balance	± 1.0 dB max
Phase Balance	$\pm 8^\circ$
Impedance	50 Ohms
Power Rating	30W

► Mechanical Data

Input/Output Connectors	2.92mm-Female
Dimensions	29.6×24×12.7mm

► Environmental Data

Operating Temperature	-40°C~+85°C
-----------------------	-------------

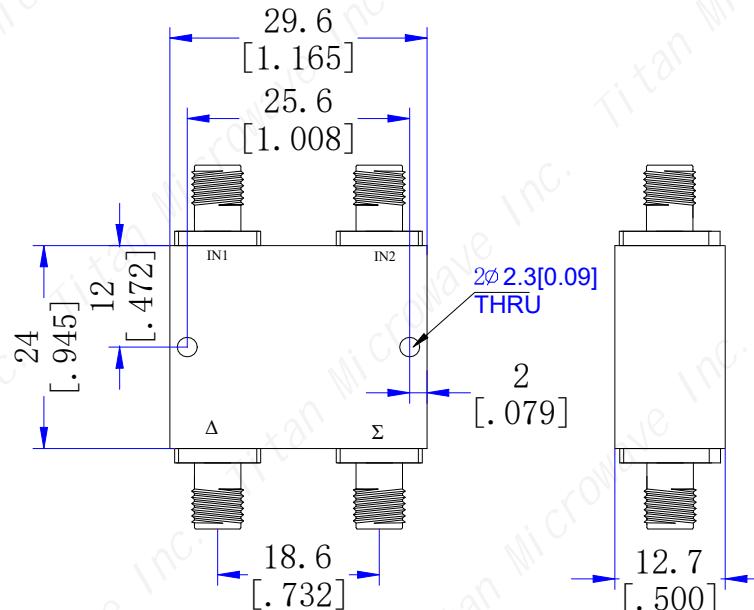

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22
ENGINEER: J. Zhu 21/12/22
APPROVED: C. Chen 21/12/22
TOLERANCE UNLESS OTHERWISE SPECIFIED
x ± 0.50 [0.019"]
.x ± 0.20 [0.008"]
.xx ± 0.10 [0.004"]
ANGLES $\pm 1^\circ$

TITLE:
3dB 180 Deg. Hybrid
Coupler, 26~28GHz,
30W, 2.92mm-Female
PART No.:
TMHC180-26002800-30K

 成都巨人微波
TITAN MICROWAVE INC.
A Professional RF & Microwave Components Supplier

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4 SCALE: SHEET: 1/1 REV: A