

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Frequency Range	2.6-3.4GHz
Insertion Loss	1.0dB max
(excluding theoretical loss 12.0dB)	
Input Port VSWR	1.18 typ, 1.32 max
Output Port VSWR	1.12 typ, 1.20 max
Isolation	20dB min, 26dB typ
Amplitude Balance	±0.4dB
Phase Balance	±5°
Impedance	50 Ohms
Power Rating	20W(as a splitter)
Power Rating	1W(as a combiner)

### ► Mechanical Data

Input/Output Connectors	SMA-Female
Connector Material	Stainless Steel
Dimensions	214×78×10mm
Surface Finish	Black Painted
Weight	410g

### ► Environmental Data

Operating Temperature -45°C~+85°C

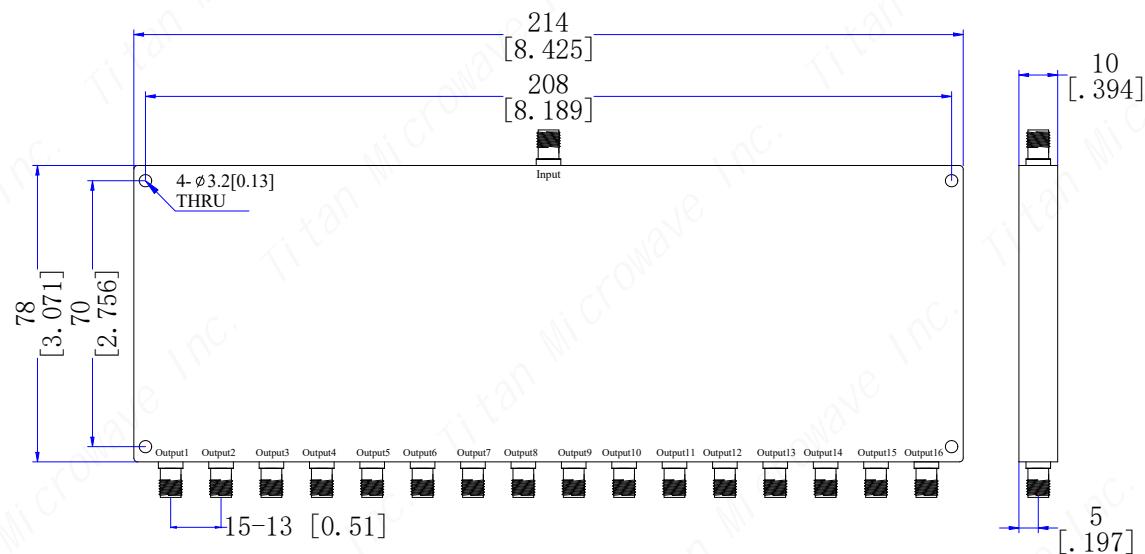

#### Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22	TITLE:  Power Divider, 16 Way, 2.6~3.4GHz, 20W, SMA-Female	PART No.:  TMPD16-02600340-20S	 成都巨人微波 <b>TITAN MICROWAVE INC.</b> <i>- A Professional RF &amp; Microwave Components Supplier -</i> <a href="http://www.titan-microwave.com">www.titan-microwave.com</a>
ENGINEER: J. Zhu 21/12/22			
APPROVED: C. Chen 21/12/22			
TOLERANCE UNLESS OTHERWISE SPECIFIED			
x ±0.50 [0.019"]			
.x ±0.20 [0.008"]			
.xx ±0.10 [0.004"]			
ANGLES ±1°			
	DIMENSIONS IN MILLIMETERS(mm)		
	SIZE: A4	SCALE: 1/1	SHEET: 1/1
	REV: A		