

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	0.95-2.15GHz
Insertion Loss (excluding theoretical loss 12.0dB)	1.0dB max
Input Port VSWR	1.16 typ, 1.30 max
Output Port VSWR	1.14 typ, 1.20 max
Isolation	20dB min, 26dB typ
Amplitude Balance	±0.4dB
Phase Balance	±4°
Impedance	50 Ohms
Power Rating (as a splitter)	30W
Power Rating (as a combiner)	2W

► Mechanical Data

Input/Output Connectors	N-Female
Dimensions	404×108×20mm
Surface Finish	Sandblasting Natural Color Conductive Oxidation

► Environmental Data

Operating Temperature	-35°C~+75°C
-----------------------	-------------

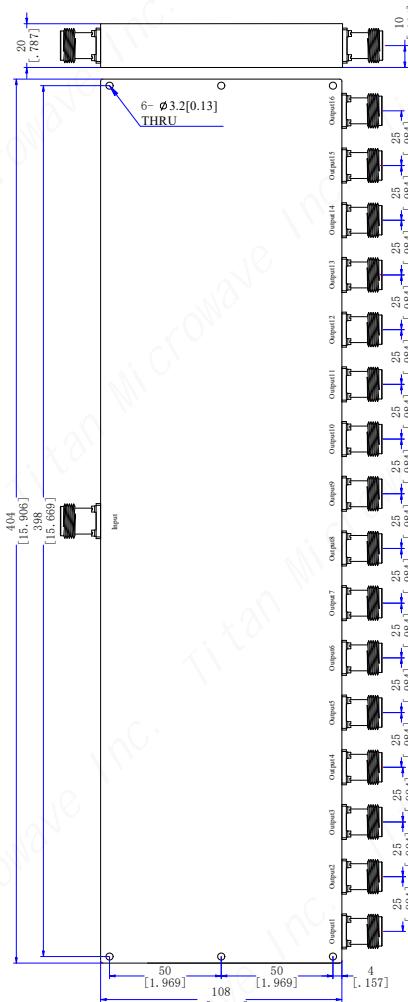


DRAWN: L. Ma 21/12/22
ENGINEER: J. Zhu 21/12/22
APPROVED: C. Chen 21/12/22
TOLERANCE UNLESS OTHERWISE SPECIFIED
$x \pm 0.50 [0.019"]$ $.x \pm 0.20 [0.008"]$ $.xx \pm 0.10 [0.004"]$ ANGLES $\pm 1^\circ$

TITLE:
Power Divider, 16 Way,
0.95~2.15GHz, 30W,
N-Female

PART No.:
TMPD16-00950215-30N

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4 **SCALE:** **SHEET:** 1/1 **REV:** A

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY