

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	500-2000MHz
Insertion Loss (excluding theoretical loss 12.0dB)	1.4dB max
Input Port VSWR	1.50 max
Output Port VSWR	1.25 max
Isolation	18dB min
Amplitude Balance	±0.3dB
Phase Balance	±4°
Impedance	50 Ohms
Power Rating	160W(as a splitter)
Power Rating	30W(as a combiner)

► Mechanical Data

Input/Output Connectors	N-Female
Dimensions	400×320×24mm
Surface Finish	Sandblasting Natural Color Conductive Oxidation

► Environmental Data

Operating Temperature -35°C ~ +75°C

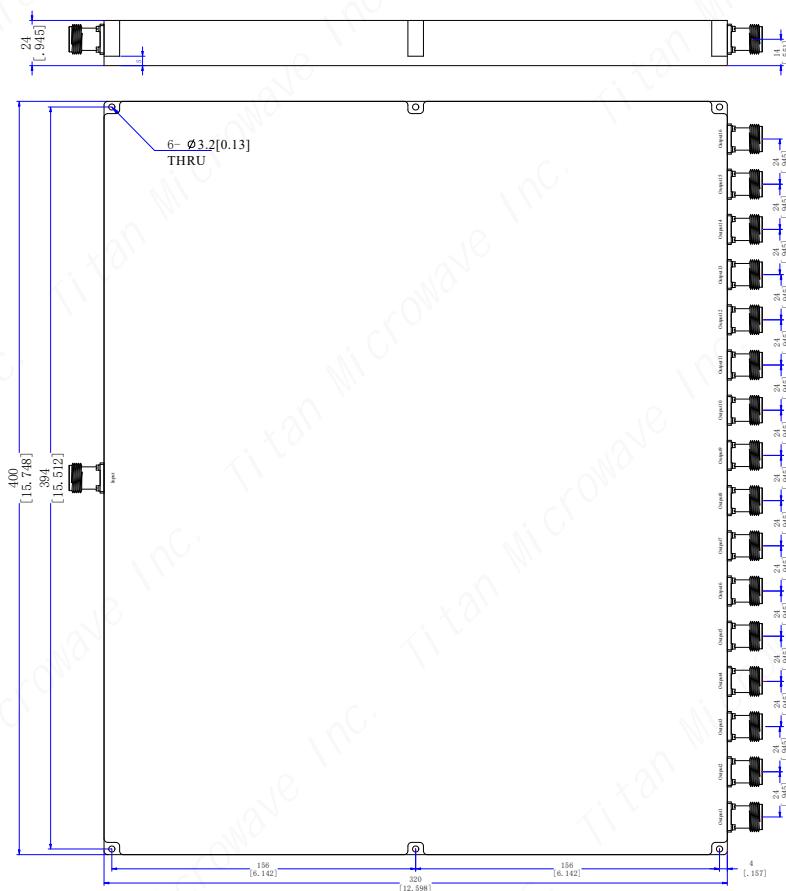

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22	TITLE:	
ENGINEER: J. Zhu 21/12/22	Power Divider, 16 Way, 0.5~2GHz, 160W, N-Female	
APPROVED: C. Chen 21/12/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	± 0.50	[0.019"]
.x	± 0.20	[0.008"]
.xx	± 0.10	[0.004"]
ANGLES	$\pm 1^\circ$	
PART No.:		TMPD16-00500200-160N
 www.titan-microwave.com		
  DIMENSIONS IN MILLIMETERS(mm)		
SIZE: A4	SCALE:	SHEET: 1/1
REV: A		