

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	0.8-7.5GHz
Insertion Loss	4.0dB max
(excluding theoretical loss 12.0dB)	
Input Port VSWR	1.18 typ, 1.50 max
Output Port VSWR	1.12 typ, 1.30 max
Isolation	18dB min, 26dB typ
Amplitude Balance	±0.5dB
Phase Balance	±8°
Impedance	50 Ohms
Power Rating	20W(as a splitter)
Power Rating	1W(as a combiner)

► Mechanical Data

Input/Output Connectors	SMA-Female
Connector Material	Stainless Steel
Dimensions	210.5×102×10mm
Surface Finish	Black Painted
Weight	600g

► Environmental Data

Operating Temperature -45°C~+85°C

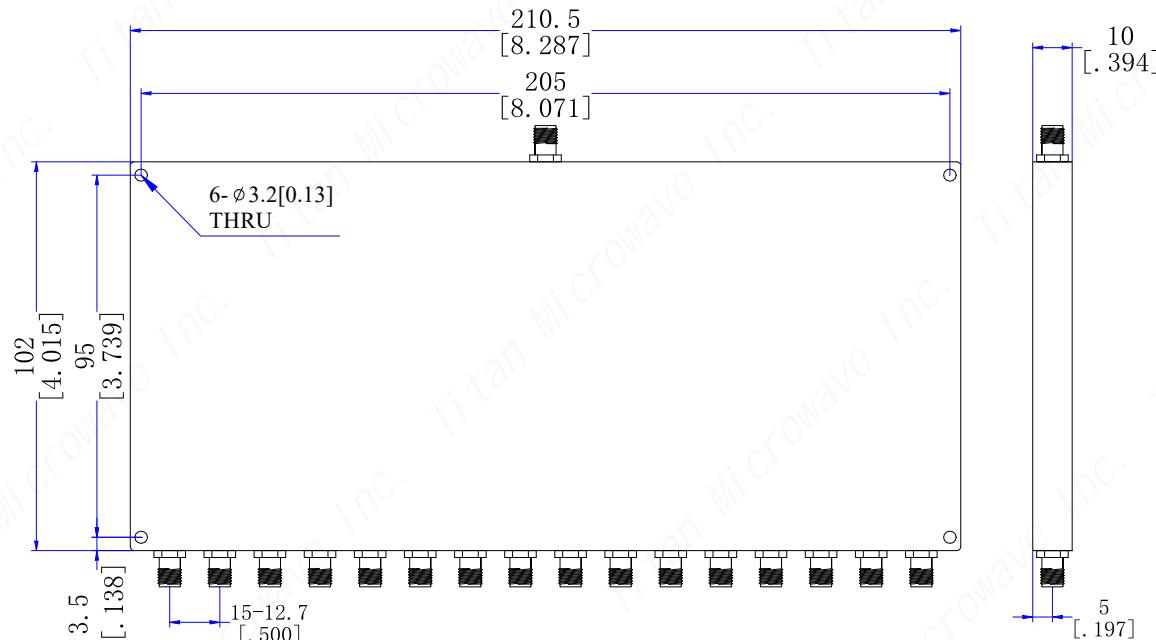

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22	TITLE: Power Divider, 16 Way, 0.8~7.5GHz, 20W, SMA-Female	PART No.: TMPD16-00800750-20S	 成都巨人微波 TITAN MICROWAVE INC. <i>- A Professional RF & Microwave Components Supplier -</i> www.titan-microwave.com
ENGINEER: J. Zhu 21/12/22			
APPROVED: C. Chen 21/12/22			
TOLERANCE UNLESS OTHERWISE SPECIFIED			
x ±0.50 [0.019"]			
.x ±0.20 [0.008"]			
.xx ±0.10 [0.004"]			
ANGLES ±1°			
			DIMENSIONS IN MILLIMETERS(mm)
		SIZE: A4	SCALE: 1/1
		SHEET: 1/1	REV: A