

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	800-3000MHz
Insertion Loss	2.4dB max
(excluding theoretical loss 10.8dB)	
Input Port VSWR	1.18 typ, 1.4 max
Output Port VSWR	1.12 typ, 1.3 max
Isolation	18dB min
Amplitude Balance	±0.8dB
Phase Balance	±8°
Impedance	50 Ohms
Power Rating	20W(as a splitter)
Power Rating	1W(as a combiner)

► Mechanical Data

Input/Output Connectors	SMA-Female
Dimensions	165×125×12mm
Surface Finish	Sandblasting natural color conductive oxidation

► Environmental Data

Operating Temperature	-35°C~+75°C
-----------------------	-------------

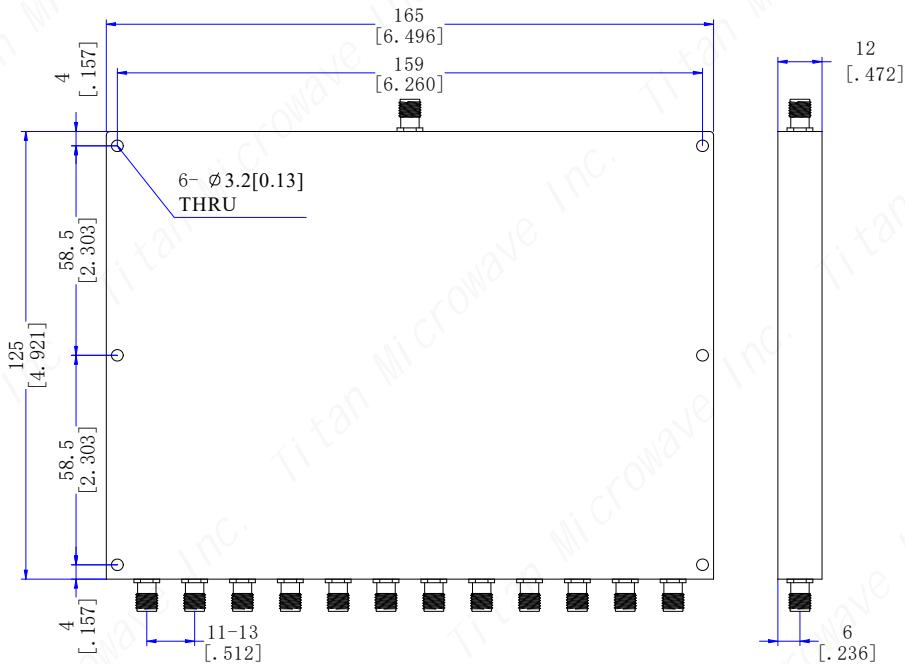

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22	TITLE: Power Divider, 12 Way, 0.8~3GHz, 20W, SMA-Female	PART No.: TMPD12-00800300-20S	DIMENSIONS IN MILLIMETERS(mm) SIZE: A4 SCALE: SHEET: 1/1 REV: A
ENGINEER: J. Zhu 21/12/22			
APPROVED: C. Chen 21/12/22			
TOLERANCE UNLESS OTHERWISE SPECIFIED			
x ±0.50 [0.019"]			
.x ±0.20 [0.008"]			
.xx ±0.10 [0.004"]			
ANGLES ±1°			

TITAN MICROWAVE INC.
A Professional RF & Microwave Components Supplier

www.titan-microwave.com