

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	0.3~18GHz
Insertion Loss (excluding theoretical loss 9.0dB)	5.0dB max
Input Port VSWR	2.3:1 max@300~400MHz 1.6:1 max@400~18000MHz
Output Port VSWR	1.5 max
Isolation	7dB min@300~400MHz 16dB min@400~18000MHz
Amplitude Balance	±0.5dB
Phase Balance	±8°
Impedance	50 Ohms
Power Rating	20W(as a splitter) 1W(as a combiner)

► Mechanical Data

Input/Output Connectors	SMA-Female
Connectors Material	Passivated Stainless Steel
Dimensions	146×161.9×10mm
Surface Finish	Black/Blue/Gray Painted
Weight	700g

► Environmental Data

Operating Temperature	-45°C~+85°C
-----------------------	-------------

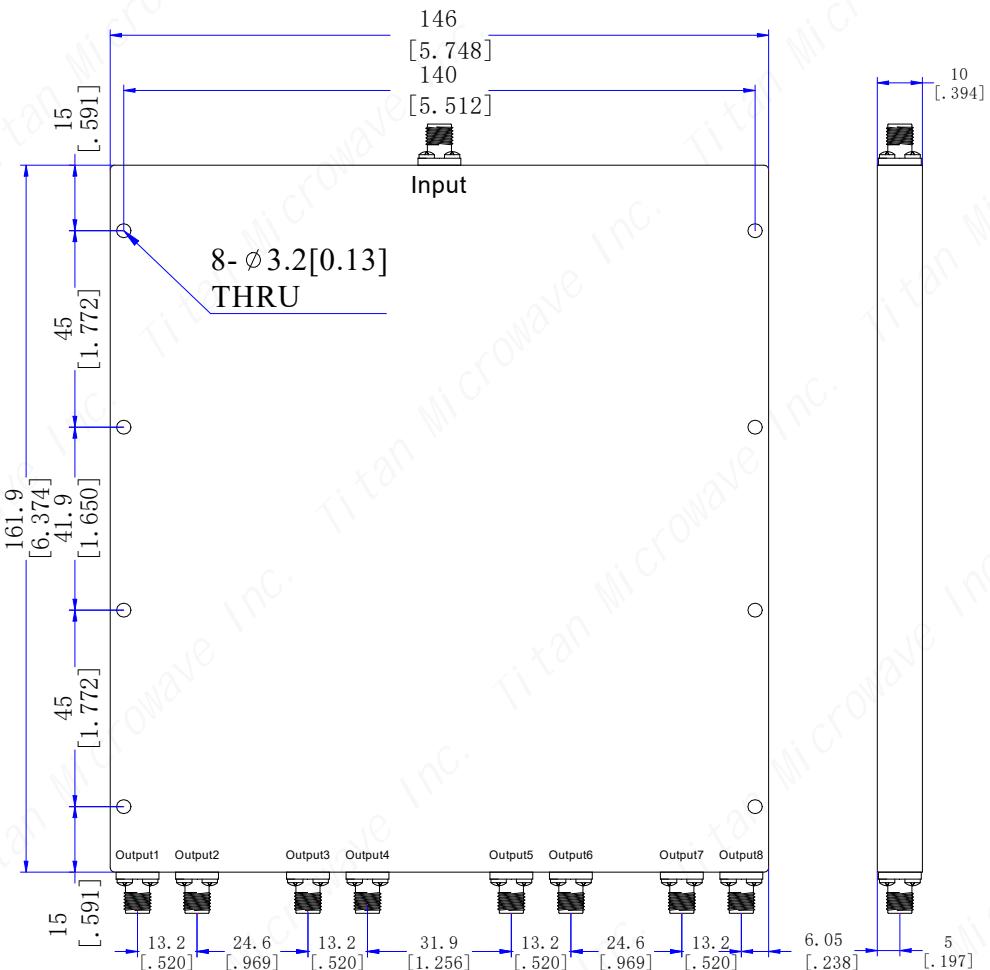


DRAWN: L. Ma 21/12/22
ENGINEER: J. Zhu 21/12/22
APPROVED: C. Chen 21/12/22
TOLERANCE UNLESS OTHERWISE SPECIFIED
x ±0.50 [0.019"]
.x ±0.20 [0.008"]
.xx ±0.10 [0.004"]
ANGLES ±1°

TITLE:
Power Divider, 8 Way,
0.3~18GHz, 20W,
SMA-Female
PART No.:
TMPD8-00301800-20S

 成都巨人微波
TITAN MICROWAVE INC.
A Professional RF & Microwave Components Supplier

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE:
A4

SCALE:

SHEET:
1/1

REV:
A

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY