

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Frequency Range	2~18GHz
Insertion Loss	2.8dB max
VSWR Primary	1.80 max
VSWR Secondary	1.80 max
Isolation	12dB min
Frequency Sensitivity	$\pm 1.6\text{dB}$
Phase Balance	$\pm 13^\circ$
Impedance	50 Ohms
Power Rating	30W

### ► Mechanical Data

Input/Output Connectors	SMA-Female
Dimensions	82×36×11mm
Surface Finish	Black Painted

### ► Environmental Data

Operating Temperature	-45°C~+85°C
-----------------------	-------------

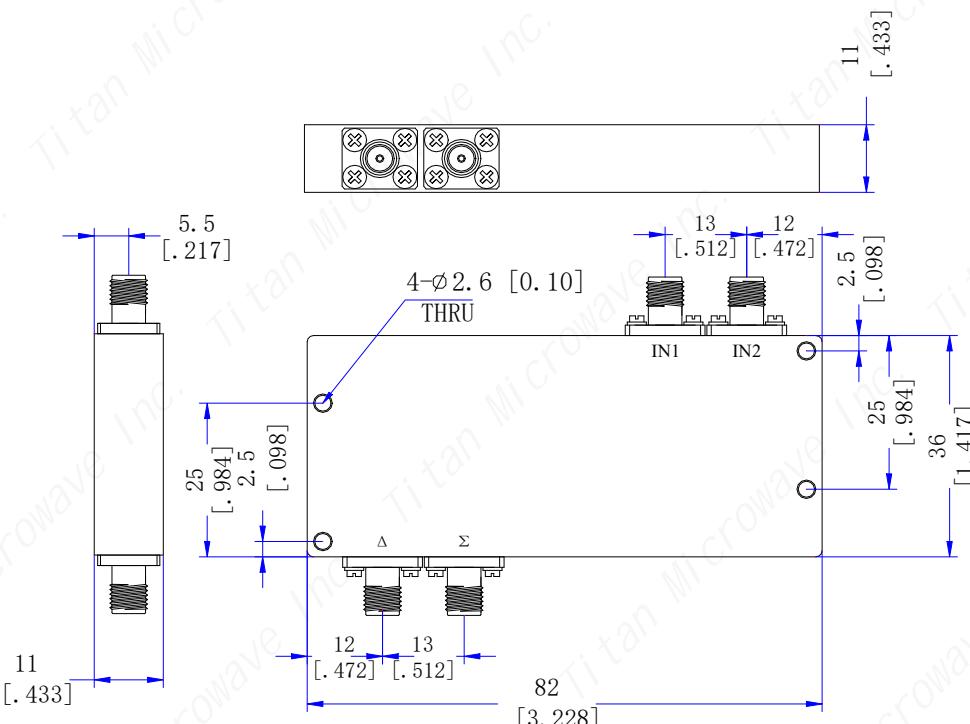

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22	TITLE: 3dB 180 Deg. Hybrid Coupler, 2~18GHz, 30W, SMA-Female	PART No.: TMHC180-02001800-30S	 成都巨人微波 <b>TITAN MICROWAVE INC.</b> - A Professional RF & Microwave Components Supplier - <a href="http://www.titan-microwave.com">www.titan-microwave.com</a>	
ENGINEER: J. Zhu 21/12/22				
APPROVED: C. Chen 21/12/22				
TOLERANCE UNLESS OTHERWISE SPECIFIED				
x $\pm 0.50$ [.019"]				DIMENSIONS IN MILLIMETERS(mm)
.x $\pm 0.20$ [.008"]				
.xx $\pm 0.10$ [.004"]				
ANGLES $\pm 1^\circ$				
SIZE: A4	SCALE:	SHEET: 1/1	REV: A	