

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Frequency Range	13-15GHz
Insertion Loss	2.2dB max
(excluding theoretical loss 9.0dB)	
Input Port VSWR	1.60 max
Output Port VSWR	1.50 max
Isolation	18dB min
Amplitude Balance	±0.8dB
Phase Balance	±8°
Impedance	50 Ohms
Power Rating	10W(as a splitter) 1W(as a combiner)

### ► Mechanical Data

Input/Output Connectors	SMA-Female
Dimensions	129×65×10mm
Surface Finish	Black Painted

### ► Environmental Data

Operating Temperature	-45°C~+85°C
-----------------------	-------------

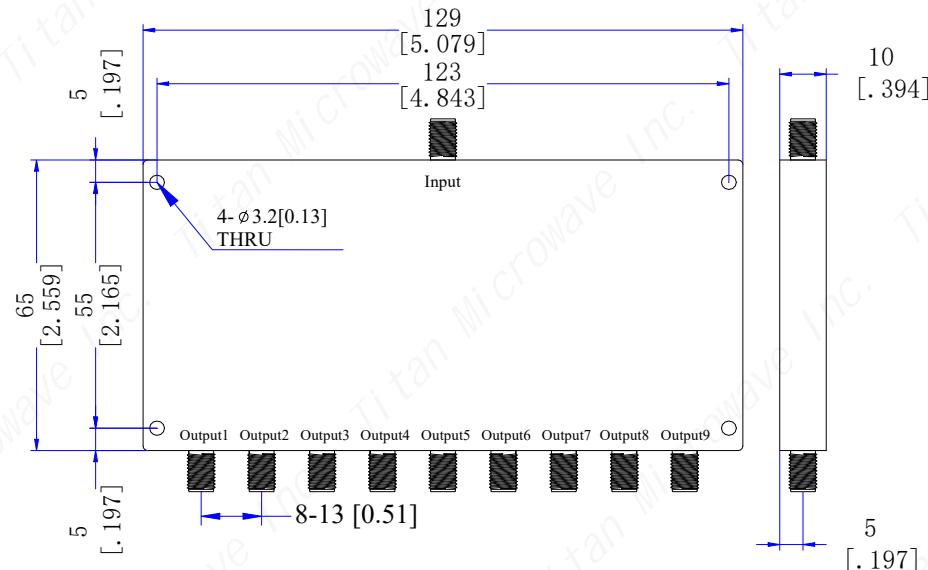

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22	TITLE:  Power Divider, 9 Way, 13~15GHz, 10W, SMA- Female	PART No.:  TMPD9-13001500-10S	TITAN MICROWAVE INC. A Professional RF & Microwave Components Supplier  <a href="http://www.titan-microwave.com">www.titan-microwave.com</a>
ENGINEER: J. Zhu 21/12/22			
APPROVED: C. Chen 21/12/22			
TOLERANCE UNLESS OTHERWISE SPECIFIED			
x ±0.50 [0.019"]			
.x ±0.20 [0.008"]			
.xx ±0.10 [0.004"]			
ANGLES ±1°			
	DIMENSIONS IN MILLIMETERS(mm)		
SIZE: A4	SCALE:	SHEET: 1/1	REV: A