

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/7/12	C. Chen

TECHNICAL DATA

► Electrical Data


Passband Frequency Range	6.0~6.6GHz
Passband Insertion Loss	≤2.0dB
Passband VSWR	≤1.4:1
Passband Ripple	≤0.5dB
Group Delay	≤0.4ns/MHz
Stopband Rejection	≥65dB@DC~5400MHz ≥65dB@6950~15000MHz
Power Handling	10W(design assurance)
Impedance	50 Ohms

► Mechanical Data

Dimensions	44×16×8.4mm
Connectors	SMA-Female(detachable 0.5mm pin)
Connector Material	Stainless Steel
Surface Finish	Silver Plated

► Environmental Data

Operating Temperature	-40℃~+70℃(design assurance)
Storage Temperature	-55℃~+85℃(design assurance)

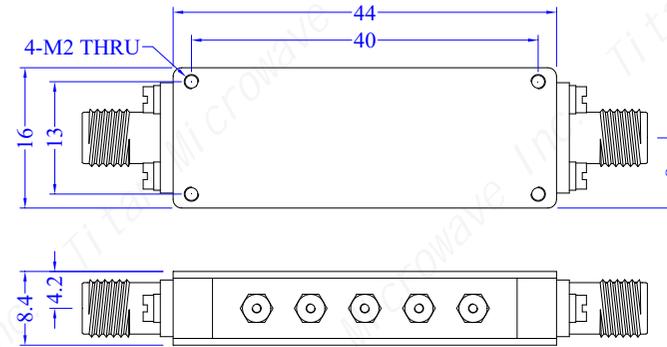


Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 12/07/22		
ENGINEER: J. Zhu 12/07/22		
APPROVED: C. Chen 12/07/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:	Band Pass Filter, 6-6.6GHz, Stopband Rejection 65dB, 10W, SMA-Female
PART No.:	TBF-06000660-65S

 <p>成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier -</p> <p>www.titan-microwave.com</p>			
 DIMENSIONS IN MILLIMETERS(mm)			
SIZE:	SCALE:	SHEET:	REV:
A4		1/1	A