

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/4/16	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	2~18GHz
Insertion Loss	≤0.6dB
VSWR Primary	≤1.35:1
VSWR Secondary	≤1.5:1
Directivity	≥15dB
Nominal Coupling	35±2.0dB
Impedance	50 Ohms
Power Rating	80W(design assurance)

► Mechanical Data

Dimensions	48×26×13mm
Input/Output Connectors	SMA-Female
Connectors Material	Stainless Steel
Housing Material	Aluminum 6061
Surface Finishing	Conductive Oxidation

► Environmental Data

Operating Temperature -40°C~+70°C (design assurance)

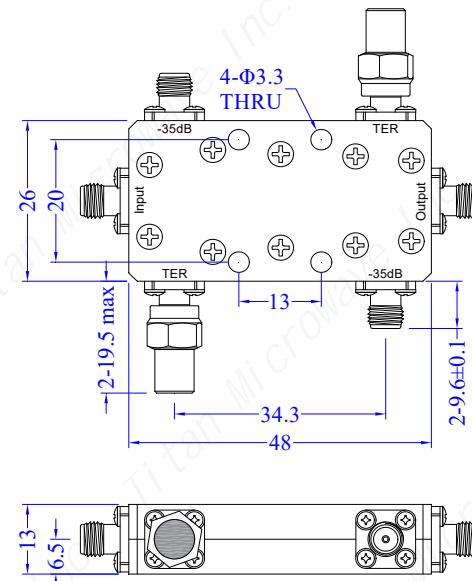

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/04/22	TITLE: Dual Directional Coupler, 2~18GHz, Coupling 35dB, 80W, SMA-Female	PART No.: TDDC-02001800-35S80	DIMENSIONS IN MILLIMETERS(mm)	
ENGINEER: J. Zhu 16/04/22				
APPROVED: C. Chen 16/04/22				
TOLERANCE UNLESS OTHERWISE SPECIFIED				
x ±0.50 [0.019"]				
.x ±0.20 [0.008"]				
.xx ±0.10 [0.004"]				
ANGLES ±1°				
SIZE: A4	SCALE:	SHEET: 1/1	REV: A	

TITAN MICROWAVE INC.
A Professional RF & Microwave Components Supplier

www.titan-microwave.com