


**TMPD2-25002800-10K**

**25 to 28 GHz, 10W, 2.92mm-Female  
 2-WAY POWER DIVIDER**

**Electrical Characteristics**

|                                 |   |
|---------------------------------|---|
| <b>Frequency Range</b> .....    | 25~28GHz  |
| <b>Insertion Loss</b> .....     | 0.6dB max<br>(excluding theoretical loss 3.0dB) |
| <b>Amplitude Balance</b> .....  | ±0.4dB max                                      |
| <b>Phase Balance</b> .....      | ±4°   |
| <b>VSWR(input port)</b> .....   | 1.28:1 typ, 1.5:1 max                           |
| <b>VSWR(output ports)</b> ..... | 1.26:1 typ, 1.5:1 max                           |
| <b>Isolation</b> .....          | 22dB min  |
| <b>Impedance</b> .....          | 50 Ohms   |
| <b>Power Handling</b> .....     | 10W   |

**Outline Drawing(mm[inch])**

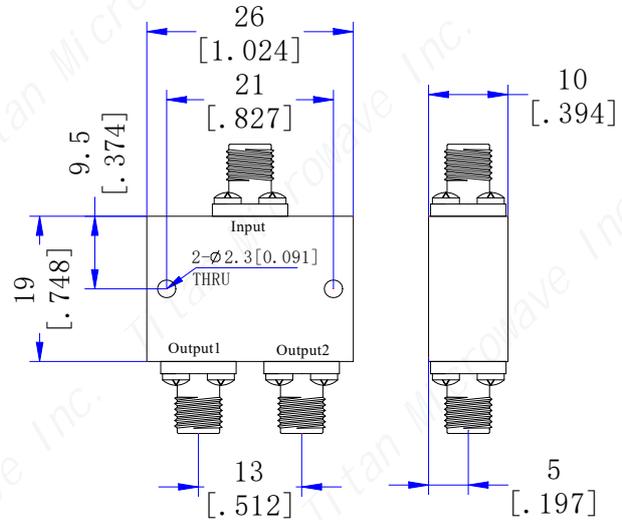

**Mechanical & Environmental Characteristics**

|                                    |                       |
|------------------------------------|-----------------------|
| <b>Dimensions</b> .....            | 26 × 19 × 10mm        |
| <b>RF Connectors</b> .....         | 2.92mm-Female         |
| <b>Connectors Material</b> .....   | Stainless Steel       |
| <b>Surface Finishing</b> .....     | Black/Blue/Gray Paint |
| <b>Operating Temperature</b> ..... | -40°C~+85°C           |
| <b>Storage Temperature</b> .....   | -50°C~+105°C          |
| <b>Weight</b> .....                | 22g                   |