

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	2000~8000MHz
Nominal Coupling	30±1.0dB max
Insertion Loss	0.25dB max
Main Line VSWR	1.25 max
Coupled Line VSWR	1.50 max
Directivity	14dB min
Impedance	50 Ohms
Average Power	400W
Peak Power	5kW max

► Mechanical Data

Input/Output Connectors	N-Female & SMA-Female
Housing Material	Aluminum 6061
Surface Finish	Black/Blue/Gray Paint
Dimensions	87×38×25mm

► Environmental Data

Operating Temperature -40°C~+70°C

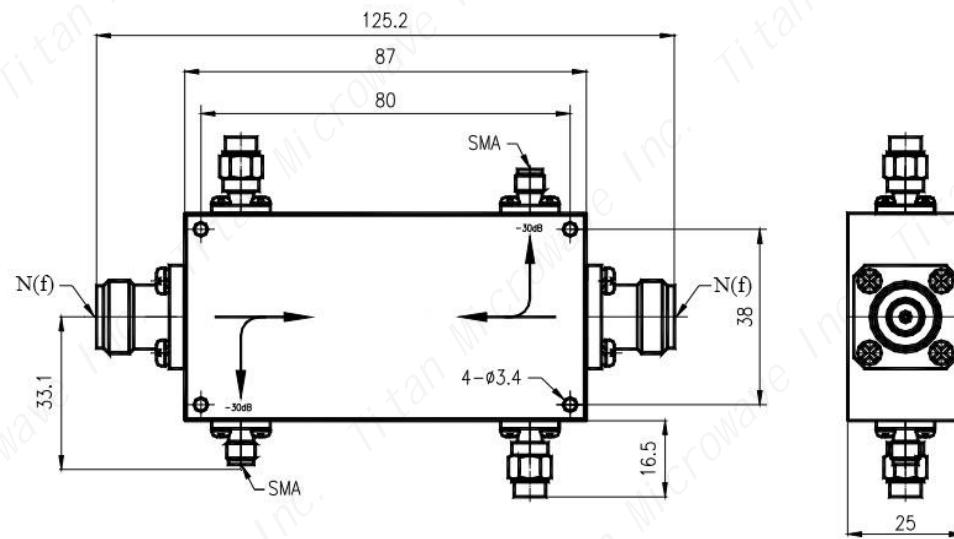

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22	TITLE: Dual Directional Coupler, 2-8GHz, Coupling 30dB, 400W, N/SMA-Female	PART No.: TDDC-02000800-30NS400	DIMENSIONS IN MILLIMETERS(mm)	SIZE: A4	SCALE:	SHEET: 1/1	REV: A
ENGINEER: J. Zhu 21/12/22							
APPROVED: C. Chen 21/12/22							
TOLERANCE UNLESS OTHERWISE SPECIFIED							
x ±0.50 [0.019"]							
.x ±0.20 [0.008"]							
.xx ±0.10 [0.004"]							
ANGLES ±1°							

TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com