

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	400~6000MHz
Insertion Loss	5.0dB max (excluding theoretical loss 12.0dB)
Input Port VSWR	1.45 max
Output Port VSWR	1.25 max
Isolation	20dB min
Amplitude Balance	±0.4dB
Phase Balance	±8°
Impedance	50 Ohms
Power Rating	20W(as a splitter) 1W(as a combiner)

► Mechanical Data

Input/Output Connectors	SMA-Female
Connectors Material	Stainless Steel
Housing Material	Aluminum
Dimensions	232×160×12mm
Surface Finish	Conductive Oxide

► Environmental Data

Operating Temperature	-35°C~+75°C
-----------------------	-------------

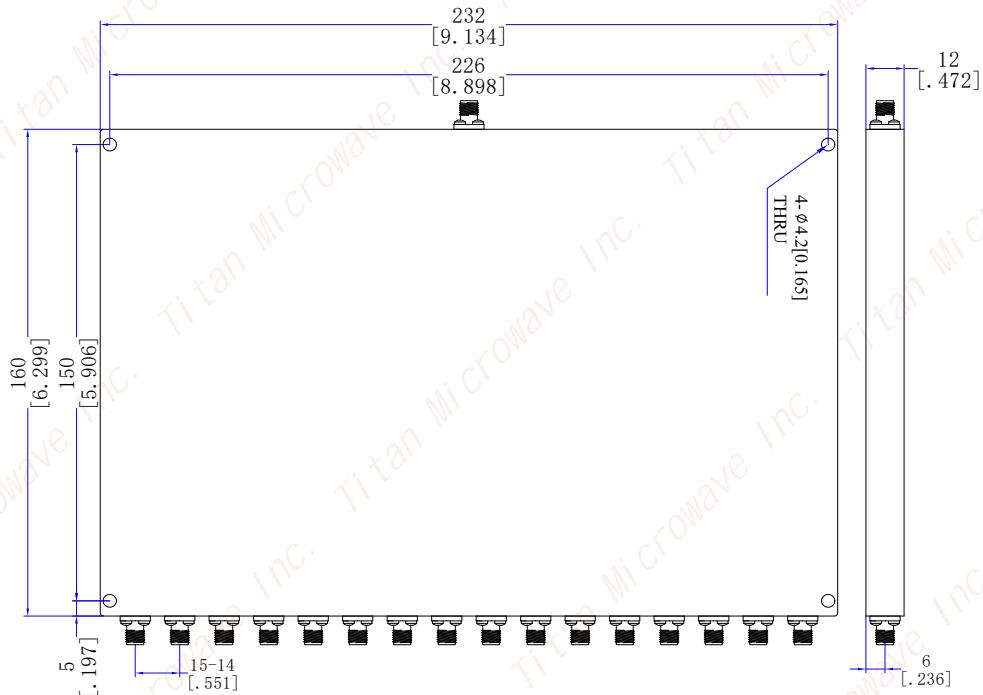

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22	TITLE: Power Divider, 16 Way, 0.4~6GHz, 20W, SMA- Female	 成都巨人微波 TITAN MICROWAVE INC. <i>- A Professional RF & Microwave Components Supplier -</i> www.titan-microwave.com
ENGINEER: J. Zhu 21/12/22		
APPROVED: C. Chen 21/12/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x ±0.50 [0.019"]	PART No.:	DIMENSIONS IN MILLIMETERS(mm)
.x ±0.20 [0.008"]	TMPD16-00400600-20S	
.xx ±0.10 [0.004"]	SIZE: A4	SCALE: 1/1
ANGLES ±1°	SHEET: 1/1	REV: A