

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	600~6000MHz
Insertion Loss	2.5dB max
(excluding theoretical loss 9.0dB)	
Input Port VSWR	1.7:1 max@600~700MHz
	1.5:1 max@700~6000MHz
Output Port VSWR	1.25 max
Isolation	16dB min
Amplitude Balance	±0.3dB
Phase Balance	±8°
Impedance	50 Ohms
Power Rating	50W(as a splitter) 3W(as a combiner)

► Mechanical Data

Input/Output Connectors	SMA-Female
Connectors Material	Passivated Stainless Steel
Dimensions	250×182×12mm
Surface Finish	Black/Blue/Gray Painted

► Environmental Data

Operating Temperature	-45°C~+75°C
-----------------------	-------------

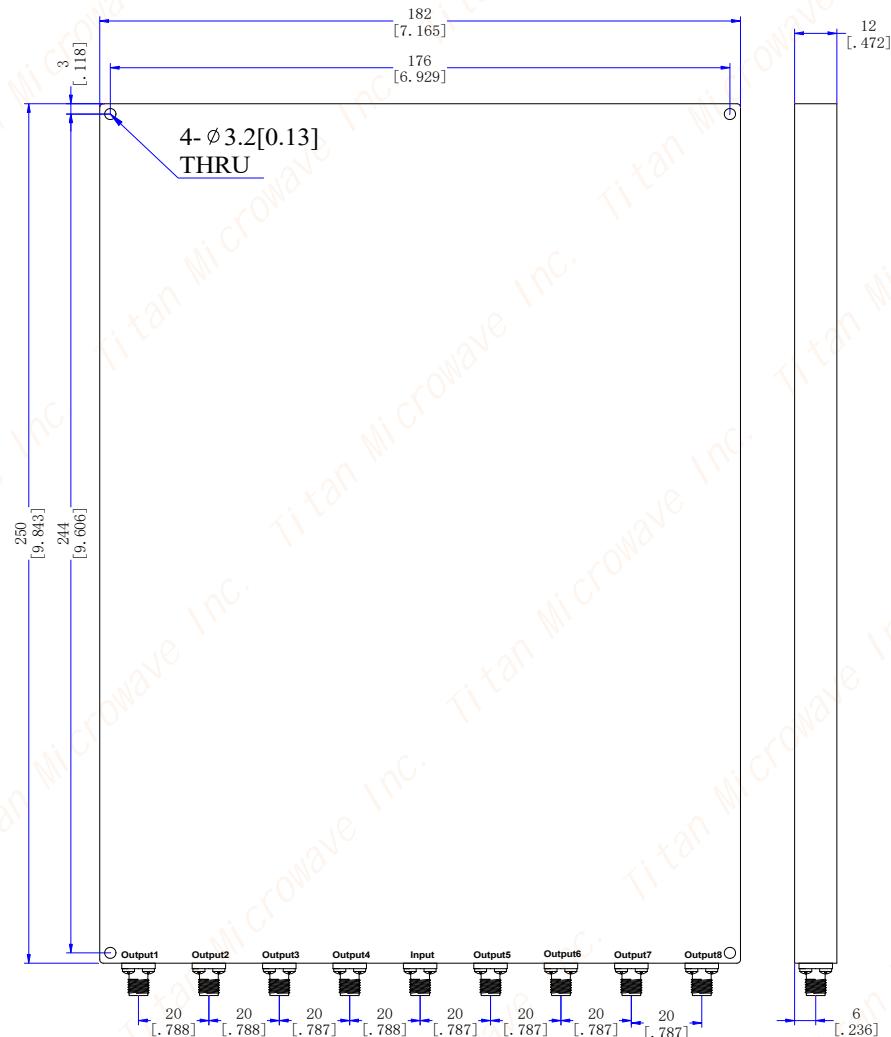

DRAWN: L. Ma 21/12/22
ENGINEER: J. Zhu 21/12/22
APPROVED: C. Chen 21/12/22
TOLERANCE UNLESS OTHERWISE SPECIFIED

x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Power Divider, 8 Way,
0.6~6GHz, 50W
SMA-Female
PART No.:
TMPD8-00600840-20S

TITAN MICROWAVE INC.
A Professional RF & Microwave Components Supplier

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

SIZE:	SCALE:	SHEET:	REV:
A4		1/1	A