

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/7/12	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	400~6000MHz
Insertion Loss	2.8dB max
(excluding theoretical loss 3.0dB)	
VSWR(input port)	1.16:1 typ, 1.45:1 max
VSWR(output port)	1.12:1 typ, 1.25:1 max
Isolation	18dB min, 26dB typ
Amplitude Balance	±0.2dB
Phase Balance	±3°
Impedance	50 Ohms
Power Rating	60W(as a splitter) 3W(as a combiner)

► Mechanical Data

Dimensions	178×44×20mm
Connectors	N-Female
Surface Finish	Conductive Oxide

► Environmental Data

Operating Temperature	-35°C~+75°C
-----------------------	-------------

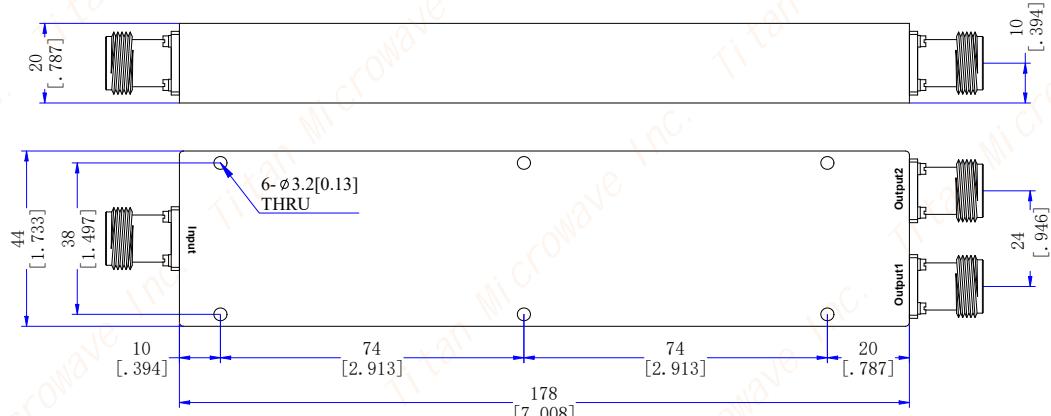

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 12/07/22	TITLE: Power Divider, 2 Way, 0.4~6GHz, 60W N-Female	PART No.: TMPD2-00400600-60N	DIMENSIONS IN MILLIMETERS(mm)
ENGINEER: J. Zhu 12/07/22			
APPROVED: C. Chen 12/07/22			
TOLERANCE UNLESS OTHERWISE SPECIFIED			
x ±0.50 [0.019"]			
.x ±0.20 [0.008"]			
.xx ±0.10 [0.004"]			
ANGLES ±1°			
SIZE: A4	SCALE: 1/1	SHEET: 1/1	REV: A

TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com