
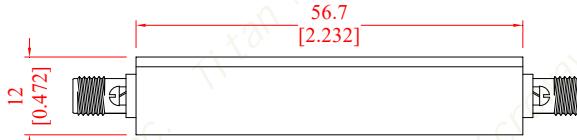


REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/8/21	C. Chen

TECHNICAL DATA

► Electrical Data

Frequency Range	0.05-8GHz
Output Power(P1dB)	19dBm typ
Gain	40dB typ
Gain Flatness	± 2.0 dB typ
Noise Figure	1.6dB typ
VSWR Input	1.8:1 typ
VSWR Output	2:1 typ
DC Voltage	+12V
Current	160mA
Input Power(CW)	+5dBm max
Impedance	50 Ohms

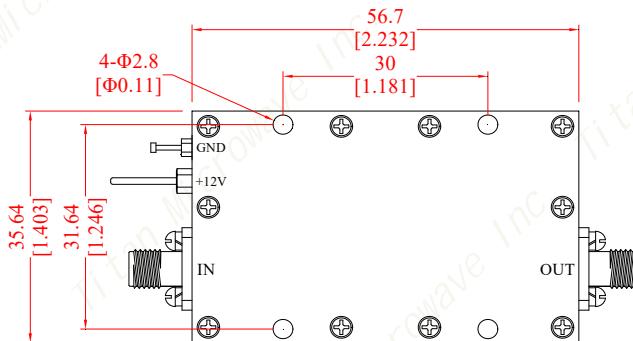

► Mechanical Data

Dimensions	56.7×35.64×12mm
Input/Output Connector	SMA-Female
Weight	150g

► Environmental Data

Operating Temperature	-40°C~+55°C
Storage Temperature	-40°C~+85°C

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/08/22	TITLE: Low Noise Amplifier, 0.05-8GHz, Gain 40dB, P1dB 19dBm, Noise Figure 1.6dB, +12V, SMA-Female		
ENGINEER: J. Zhu 21/08/22			
APPROVED: C. Chen 21/08/22			
TOLERANCE UNLESS OTHERWISE SPECIFIED			
x ± 0.50 [0.019"]			
.x ± 0.20 [0.008"]			
.xx ± 0.10 [0.004"]			
ANGLES $\pm 1^\circ$			
PART No.: TMLA-00050800-4019-16		DIMENSIONS IN MILLIMETERS(mm)	
SIZE: A4	SCALE: 1/1	SHEET: 1/1	REV: A

TITAN MICROWAVE INC.
A Professional RF & Microwave Components Supplier

www.titan-microwave.com