


REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/8/21	C. Chen

## TECHNICAL DATA

### ► Electrical Data

Frequency Range	18-40GHz
Output Power(P1dB)	16dBm
Gain	35dB
Gain Flatness	$\pm 3.0\text{dB}$ max
Noise Figure	4.0dB max
VSWR Input	2.0:1 typ
VSWR Output	2.0:1 typ
DC Voltage	+9V
Spurious	60dBc min
Impedance	50 Ohms

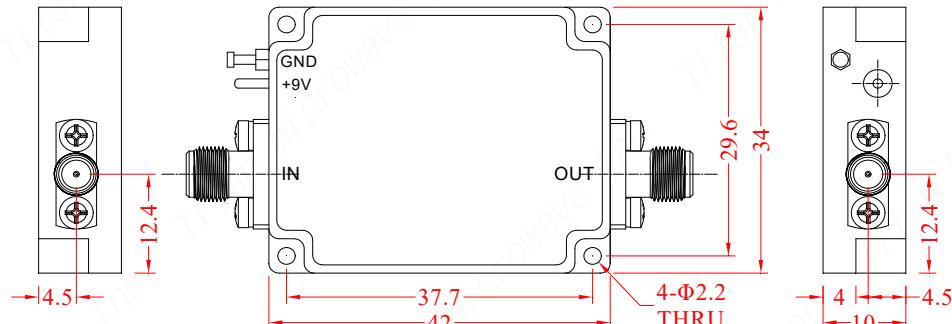

### ► Mechanical Data

Dimensions	42×34×10mm
Input/Output Connector	2.92mm-Female

### ► Environmental Data

Operating Temperature	-40°C~+65°C
-----------------------	-------------

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/08/22
ENGINEER: J. Zhu 21/08/22
APPROVED: C. Chen 21/08/22
TOLERANCE UNLESS OTHERWISE SPECIFIED

$x$   $\pm 0.50$  [0.019"]  
 $.x$   $\pm 0.20$  [0.008"]  
 $.xx$   $\pm 0.10$  [0.004"]  
 ANGLES  $\pm 1^\circ$

**TITLE:**  
 Low Noise Amplifier, 18-40GHz, Gain 35dB, P1dB 16dBm, Noise Figure 4dB, +9V, 2.92mm-Female  
**PART No.:**  
 TMLA-18004000-3516-40

 成都巨人微波  
**TITAN MICROWAVE INC.**  
*A Professional RF & Microwave Components Supplier*

[www.titan-microwave.com](http://www.titan-microwave.com)

DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
----------	--------	------------	--------