

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	5~1000MHz
Insertion Loss	3.6dB max
(excluding theoretical loss 9.0dB)	
Input Port VSWR	1.5:1 max
Output Port VSWR	1.4:1 max
Isolation	18dB min
Amplitude Balance	± 0.5 dB
Phase Balance	$\pm 5^\circ$
Impedance	50 Ohms
Power Rating	1W(as a splitter) 0.5W(as a combiner)

► Mechanical Data

Input/Output Connectors	N-Female
Dimensions	200×58×22mm
Surface Finish	Conductive Oxidation
Weight	660g

► Environmental Data

Operating Temperature	-35°C~+75°C
-----------------------	-------------

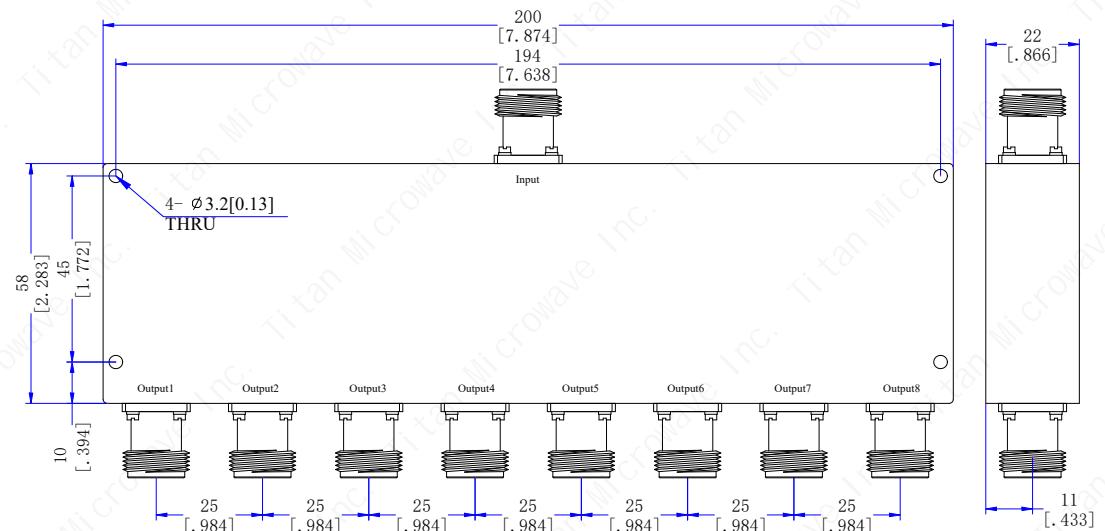

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22
ENGINEER: J. Zhu 21/12/22
APPROVED: C. Chen 21/12/22
TOLERANCE UNLESS OTHERWISE SPECIFIED
x ± 0.50 [0.019"]
.x ± 0.20 [0.008"]
.xx ± 0.10 [0.004"]
ANGLES $\pm 1^\circ$

TITLE:
Power Divider
8 Way, 5~1000MHz
1W, N-Female

PART No.:
TMPD8-5M0100-1N

 成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com

		DIMENSIONS IN MILLIMETERS(mm)	
SIZE: A4	SCALE: 1/1	SHEET: 1/1	REV: A