

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	50~150MHz
Insertion Loss	2.0dB max
(excluding theoretical loss 9.0dB)	
Input/Output Port VSWR	1.25:1 max
Isolation	18dB min, 26dB typ
Amplitude Balance	$\pm 0.5\text{dB}$
Phase Balance	$\pm 5^\circ$
Impedance	50 Ohms
Power Rating	1W(as a splitter) 0.5W(as a combiner)

► Mechanical Data

Input/Output Connectors	SMA-Female
Dimensions	120×56×13mm
Surface Finish	Conductive Oxidation
Weight	260g

► Environmental Data

Operating Temperature	-35°C~+75°C
-----------------------	-------------

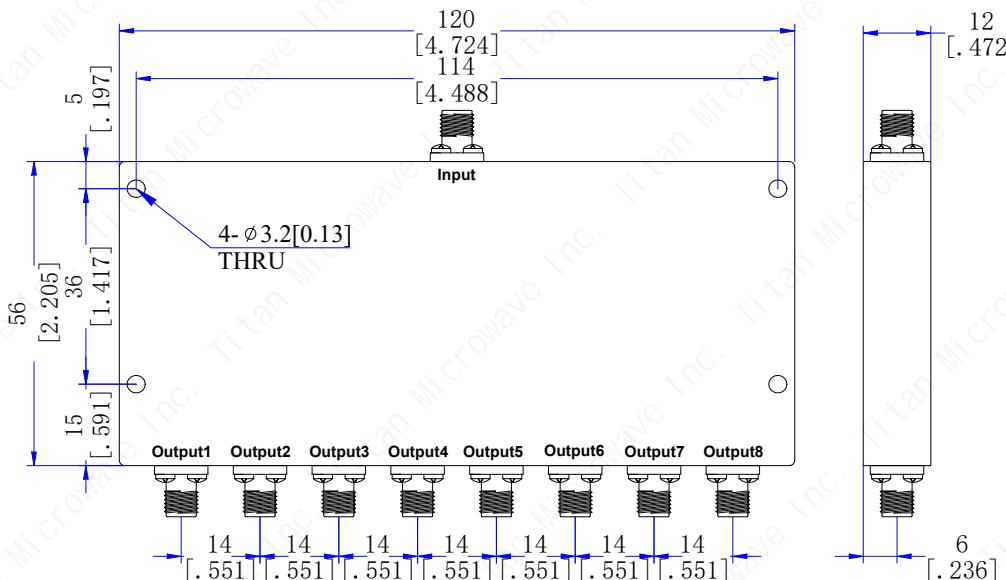

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22
ENGINEER: J. Zhu 21/12/22
APPROVED: C. Chen 21/12/22
TOLERANCE UNLESS OTHERWISE SPECIFIED

x	± 0.50	[0.019"]
.x	± 0.20	[0.008"]
.xx	± 0.10	[0.004"]
ANGLES	$\pm 1^\circ$	

TITLE:
Power Divider
8 Way, 50~150MHz
1W, SMA-Female
PART No.:
TMPD8-00050015-1S

TITAN MICROWAVE INC.
A Professional RF & Microwave Components Supplier

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
----------	--------	------------	--------