


**TMPD3-00010030-1S**

**10 to 300 MHz, 1W, SMA-Female  
3-WAY POWER DIVIDER**

**Electrical Characteristics**

<b>Frequency Range</b>	10~300MHz
<b>Insertion Loss</b>	1.0dB max (excluding theoretical loss 4.8dB)
<b>Amplitude Balance</b>	± 0.4dB
<b>Phase Balance</b>	± 4°
<b>VSWR(input port)</b>	1.28:1 typ, 1.45:1 max
<b>VSWR(output ports)</b>	1.19:1 typ, 1.25:1 max
<b>Isolation</b>	18dB min, 30dB typ
<b>Impedance</b>	50 Ohms
<b>Power Handling</b>	1W(as a splitter) ..... 0.15W(as a combiner)

**Outline Drawing(mm)**

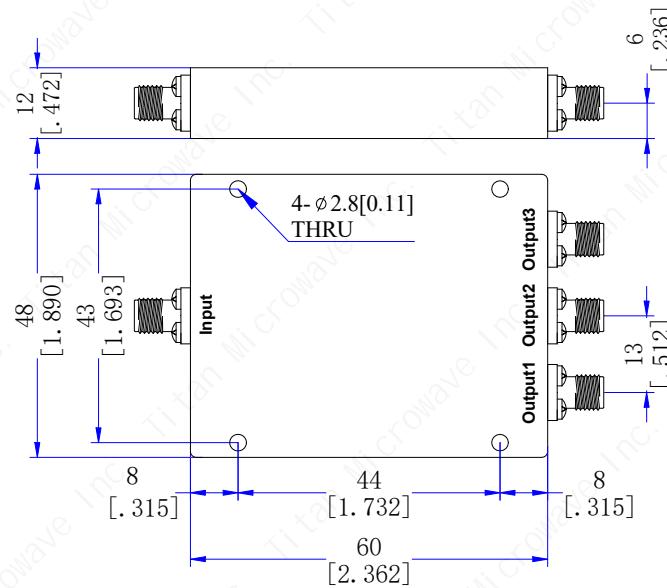

**Mechanical & Environmental Characteristics**

<b>Dimensions</b>	48 × 60 × 12mm
<b>RF Connectors</b>	SMA-Female
<b>Surface Finishing</b>	Conductive Oxidation
<b>Operating Temperature</b>	-35°C~+75°C
<b>Weight</b>	85g