

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	1-3GHz
Insertion Loss	1.2dB max
(excluding theoretical loss 12.0dB)	
Input Port VSWR	1.15:1 typ, 1.3:1 max
Output Port VSWR	1.12:1 typ, 1.2:1 max
Isolation	20dB min, 28dB typ
Amplitude Balance	±0.3dB
Phase Balance	±4°
Impedance	50 Ohms
Power Rating	30W(as a splitter) 2W(as a combiner)

► Mechanical Data

Input/Output Connectors	SMA-Female
Connector Material	Stainless Steel
Dimensions	214×90×12mm
Surface Finish	Black Painted
Weight	530g

► Environmental Data

Operating Temperature	-45°C~+85°C
-----------------------	-------------

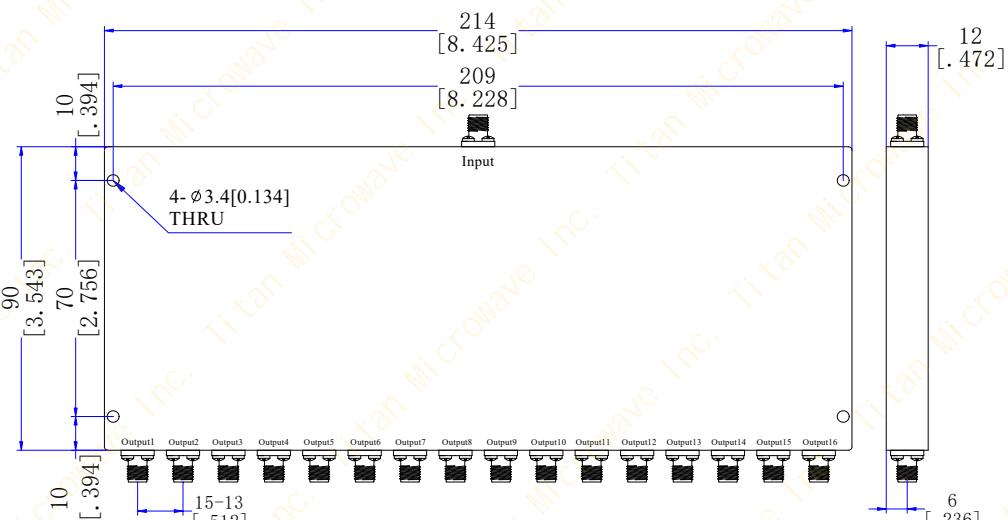

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22
ENGINEER: J. Zhu 21/12/22
APPROVED: C. Chen 21/12/22
TOLERANCE UNLESS OTHERWISE SPECIFIED

x ±0.50 [0.019"]
 .x ±0.20 [0.008"]
 .xx ±0.10 [0.004"]
 ANGLES ±1°

TITLE:
Power Divider, 16 Way,
4~8GHz, 20W
SMA-Female

PART No.: TMPD16-04000800-20S

 成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com

		DIMENSIONS IN MILLIMETERS(mm)		
		SIZE: A4	SCALE: 1/1	SHEET: 1/1
REV: A				