


**TMPD8-26004000-20K**

**26 to 40 GHz, 20W, 2.92mm-Female  
8-WAY POWER DIVIDER**

**Electrical Characteristics**

<b>Frequency Range</b>	26~40GHz
<b>Insertion Loss</b>	2.4dB max (excluding theoretical loss 9.0dB)
<b>Amplitude Balance</b>	± 0.6dB
<b>Phase Balance</b>	± 6°
<b>VSWR(input port)</b>	1.38:1 typ, 1.70:1 max
<b>VSWR(output ports)</b>	1.26:1 typ, 1.60:1 max
<b>Isolation</b>	15dB min
<b>Impedance</b>	50 Ohms
<b>Power Handling</b>	20W(as a splitter) 1W(as a combiner)

**Outline Drawing(mm)**

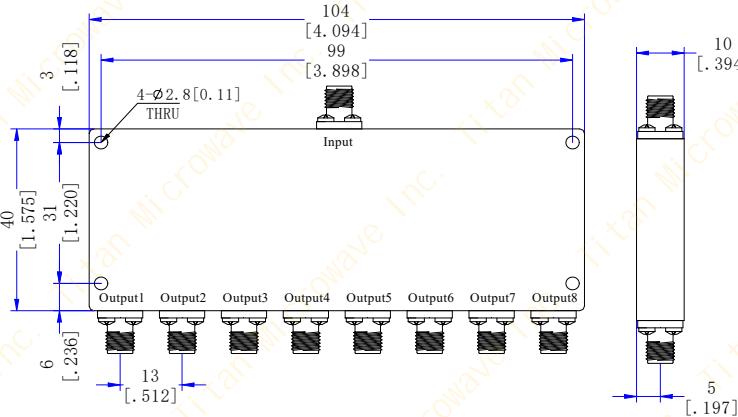

**Mechanical & Environmental Characteristics**

<b>Dimensions</b>	104 × 40 × 10mm
<b>RF Connectors</b>	2.92mm-Female
<b>Connectors Material</b>	Passivated Stainless Steel
<b>Surface Finishing</b>	Black/Blue/Gray Painted
<b>Operating Temperature</b>	-45°C~+85°C
<b>Storage Temperature</b>	-50°C~+100°C
<b>Weight</b>	138g