

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	1000-4000MHz
Insertion Loss	0.5dB max
VSWR	1.25:1 max
Isolation	20dB min
Amplitude Balance	± 0.6 dB max
Phase Balance	$\pm 5^\circ$
Impedance	50 Ohms
Power Rating	50W max

► Mechanical Data

Input/Output Connectors	SMA-Female
Dimensions	76×22×11mm
Surface Finish	Black Painted

► Environmental Data

Operating Temperature	-45°C~+85°C
-----------------------	-------------

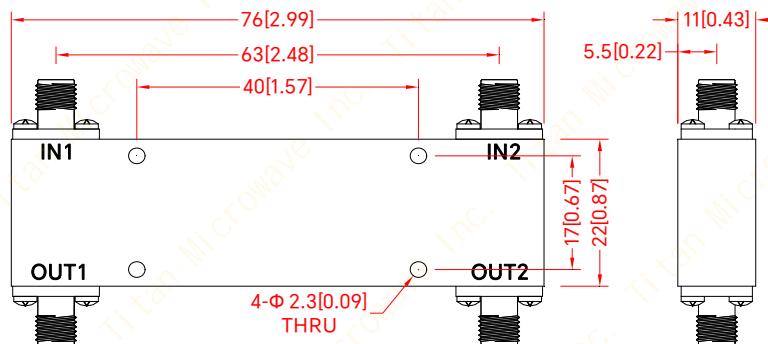

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22	TITLE: 3dB 90 Deg. Hybrid Coupler, 1~4GHz, 50W, SMA-Female	PART No.: TMHC90-01000400-50S	DIMENSIONS IN MILLIMETERS(mm)
ENGINEER: J. Zhu 21/12/22			
APPROVED: C. Chen 21/12/22			
TOLERANCE UNLESS OTHERWISE SPECIFIED			
x ± 0.50 [0.019"]			
.x ± 0.20 [0.008"]			
.xx ± 0.10 [0.004"]			
ANGLES $\pm 1^\circ$			
SIZE: A4	SCALE:	SHEET: 1/1	REV: A

TITAN MICROWAVE INC.
A Professional RF & Microwave Components Supplier

www.titan-microwave.com