

TECHNICAL DATA

► Electrical Data


Pass Band Frequency	DC-8000MHz
Pass Band Insertion Loss	$\leq 2.0\text{dB}$
Pass Band VSWR	$\leq 1.6:1$
Stop Band Rejection	$\geq 50\text{dB}@11000\sim27000\text{MHz}, \geq 30\text{dB}@8750\text{MHz}$
Impedance	50 Ohms
Power Handling	10W(design assurance)

► Mechanical Data

Dimensions	30×13×10mm
Connectors	φ0.38mm Pin
Surface Finish	Silver Plated
Body	Aluminum 6061

► Environmental Data

Temperature Range $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ (design assurance)

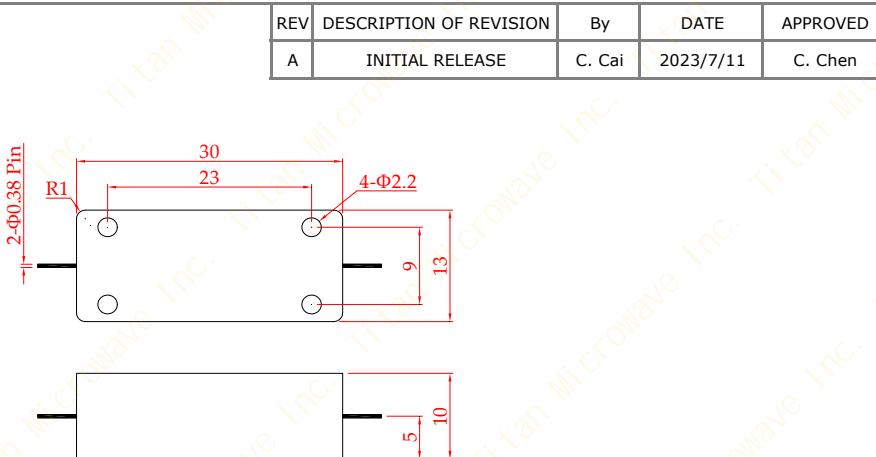

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 11/07/23
ENGINEER: J. Zhu 11/07/23
APPROVED: C. Chen 11/07/23
TOLERANCE UNLESS OTHERWISE SPECIFIED
$x \quad \pm 0.50 \quad [0.019"]$ $.x \quad \pm 0.20 \quad [0.008"]$ $.xx \quad \pm 0.10 \quad [0.004"]$ ANGLES $\pm 1^{\circ}$

TITLE:
Low Pass Filter, DC-
8000MHz, Stop Band
Rejection 50dB, 10W,
φ0.38pin

PART No.:
TLF-8000-50

成都巨人微波
TITAN MICROWAVE INC.
A Professional RF & Microwave Components Supplier

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE: 1:1	SHEET: 1/1	REV: A
-------------	---------------	---------------	-----------

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/7/11	C. Chen