

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/7/12	C. Chen

TECHNICAL DATA

► Electrical Data


Passband Frequency Range	12000~14000MHz
Passband Insertion Loss	≤1.5dB
Passband VSWR	≤1.5:1
Passband Ripple	≤1.0dB
Stopband Rejection	≥65dB@DC~10200MHz ≥65dB@16100~24000MHz
Power Handling	5W(design assurance)
Impedance	50 Ohms

► Mechanical Data

Dimensions	50×12×9mm
Connectors	φ0.38mm pin
Material	Aluminum 6061
Surface Finish	Silver Plated

► Environmental Data

Operating Temperature	-40°C~+70°C
Storage Temperature	-55°C~+85°C(design assurance)

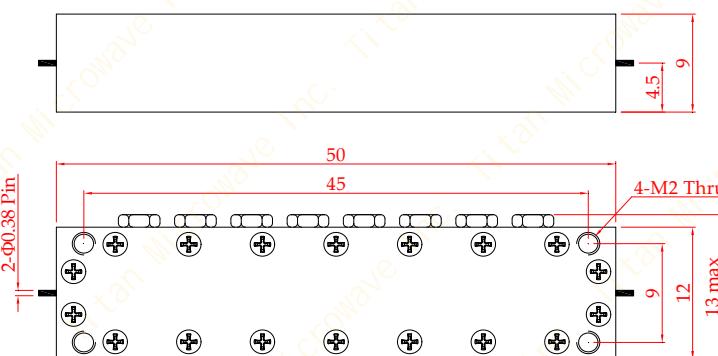

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 12/07/22	TITLE: Band Pass Filter, 12-14GHz, 65dB, 5W, φ0.38mm Pin	TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier - www.titan-microwave.com		
ENGINEER: J. Zhu 12/07/22				
APPROVED: C. Chen 12/07/22				
TOLERANCE UNLESS OTHERWISE SPECIFIED				
x ±0.50 [0.019"]		SIZE:	SCALE:	SHEET:
.x ±0.20 [0.008"]		A4		1/1
.xx ±0.10 [0.004"]				REV: A
ANGLES ±1°				
		DIMENSIONS IN MILLIMETERS(mm)		