


REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/3/18	C. Chen

## TECHNICAL DATA


### ► Electrical Data

Frequency Range	8000~18000MHz
Insertion Loss	1.4dB max
VSWR	1.6:1 max
Isolation	12dB min
Impedance	50 Ohms
Forward Power	30W
Direction	Clockwise

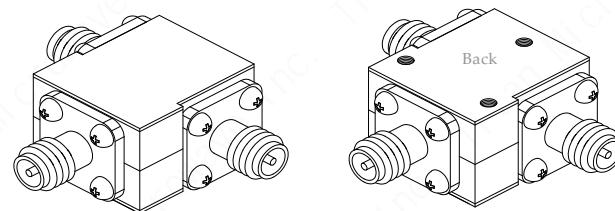

### ► Mechanical Data

Dimensions	19×20.3×14mm
Connectors	SMA-Female
Connectors Material	Copper
Housing Material	Aluminum
Surface Finish	Conductive Oxidation
Weight	44g

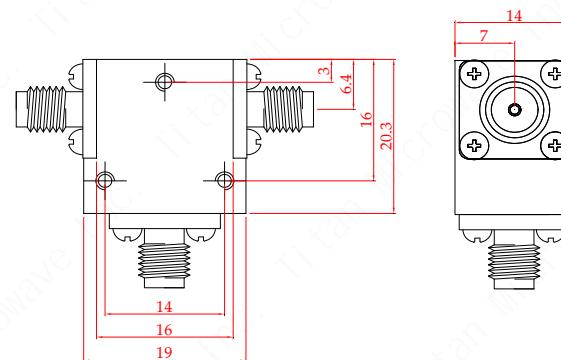

### ► Environmental Data

Temperature Range	-10°C~+60°C
Storage Temperature	-30°C~+70°C

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 19/03/23	TITLE:  Coaxial Circulator, 8~18GHz, 30W, Clockwise, SMA-Female	PART No.:  TMCC-08001800-30S	 <b>TITAN MICROWAVE INC.</b> <i>A Professional RF &amp; Microwave Components Supplier</i> <a href="http://www.titan-microwave.com">www.titan-microwave.com</a>
ENGINEER: J. Zhu 19/03/23			
APPROVED: C. Chen 19/03/23			
TOLERANCE UNLESS OTHERWISE SPECIFIED			
x      ±0.50      [0.019"]			DIMENSIONS IN MILLIMETERS(mm)
.x      ±0.20      [0.008"]			
.xx      ±0.10      [0.004"]			
ANGLES      ±1°			
SIZE: A4	SCALE:	SHEET: 1/1	REV: A