

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/3/18	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Frequency Range	5~8GHz
Insertion Loss	0.5dB max
VSWR	1.25:1 max
Isolation	19dB min
Impedance	50 Ohms
Forward Power	100W
Direction	Clockwise

### ► Mechanical Data

Dimensions	21×22.5×15mm
Connectors	SMA-Female
Housing Material	Aluminum
Surface Finish	Conductive Oxidation
Weight	60g

### ► Environmental Data

Temperature Range	-10°C~+60°C
Storage Temperature	-30°C~+70°C

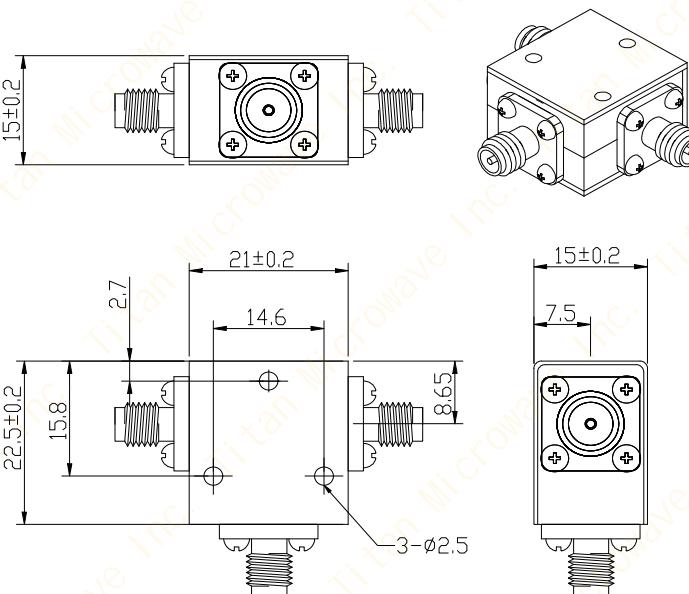

#### Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 19/03/23	TITLE:  Coaxial Circulator, 5~8GHz, 100W, Clockwise, SMA-Female	PART No.:  TMCC-05000800-100S	 <b>TITAN MICROWAVE INC.</b> <i>A Professional RF &amp; Microwave Components Supplier</i> <a href="http://www.titan-microwave.com">www.titan-microwave.com</a>	
ENGINEER: J. Zhu 19/03/23				
APPROVED: C. Chen 19/03/23				
TOLERANCE UNLESS OTHERWISE SPECIFIED				
x ±0.50 [0.019"]				DIMENSIONS IN MILLIMETERS(mm)
.x ±0.20 [0.008"]				
.xx ±0.10 [0.004"]				
ANGLES ±1°				
SIZE: A4	SCALE:	SHEET: 1/1	REV: A	