


Derating Curve

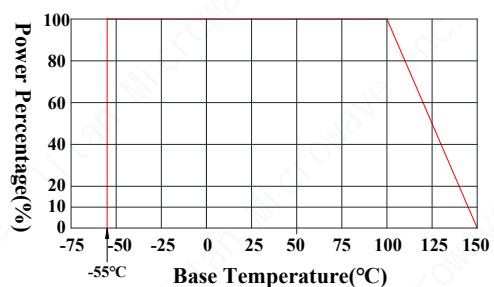

Datasheet



Model Number : TFMA2006H

Flanged Attenuator, DC-4GHz, 50W


Specifications

Frequency Range	DC-4GHz		
VSWR	1.5 max		
Nominal Power Handling	50W		
Impedance	50 Ohms		
Attenuation(dB)	0.5~9	10~20	30
Attenuation Accuracy(dB)	±0.5	±1.0	±1.0
Substrate Material	Beryllium Oxide(BeO)		
Hat Material	Aluminum Oxide(Al_2O_3)		
Flange	Nickel-plated Copper		
Dimensions	20.3×5.7×3.6mm		
Operating Temperature	-55°C~+150°C		
RoHS Status	RoHS Compliant		

Outline Drawing [mm]:

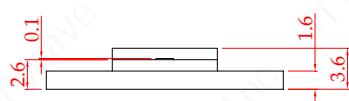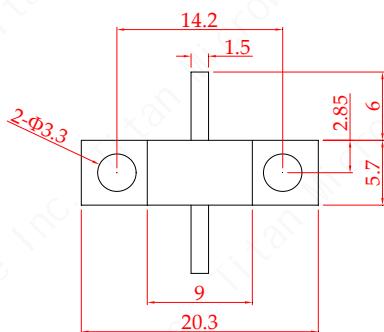

Outline A

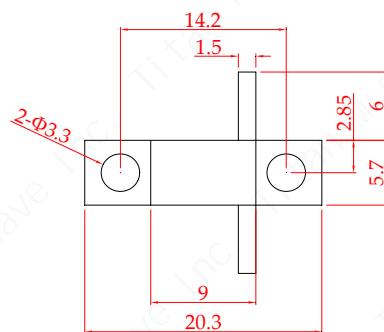

Outline B